

4

3

2

1


Features:

High Repeatability
Low VSWR

Unit:mm

**Specifications:****Electrical:**

Frequency:DC-3GHz
Impedance: 75Ohm
VSWR:1.25:1(Max.)
Insertion Loss:0.3dB(Max.)
Connection: F Male-F Male

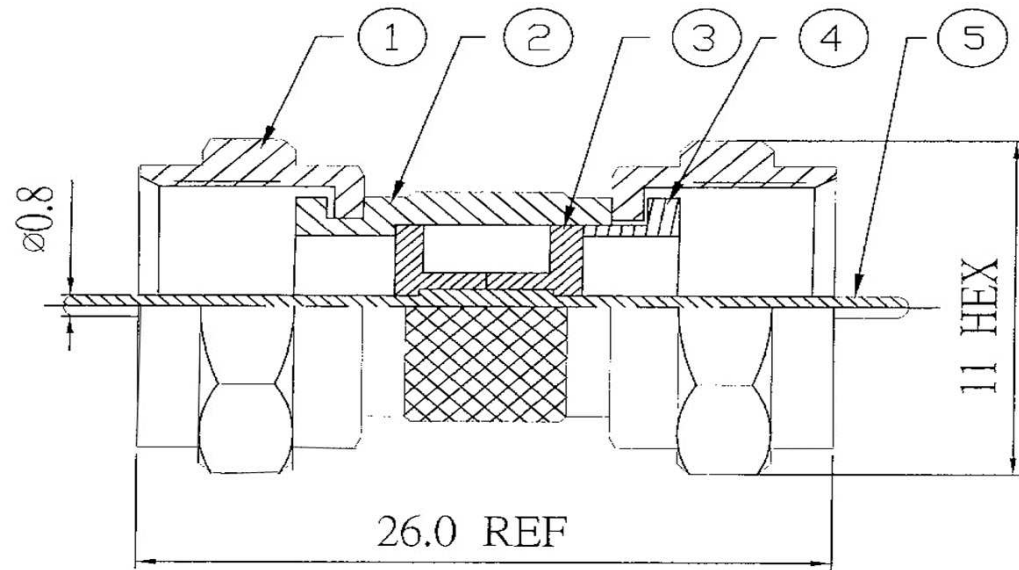**Material:**

Part	Material	Plated
Cover	Brass	Nickel
Nut	Brass	Nickel
Insulator	Nylon	
Center Contact	Brass	Nickel
Body	Brass	Nickel

UNLESS OTHERWISE SPECIFIED ALL DIMENCIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

Terence

09/02/11'

ENGR

Jack

09/02/11'

APVD

James

09/02/11'



Woken Technology Inc.

CODE

DWG TITLE

75Ω F(M)-F(M) Adapter

SIZE

A4

DWG NO.

00600F1F1M701E

4

3

2

1