

4

3

2

1

Features:

High Repeatability
Low VSWR



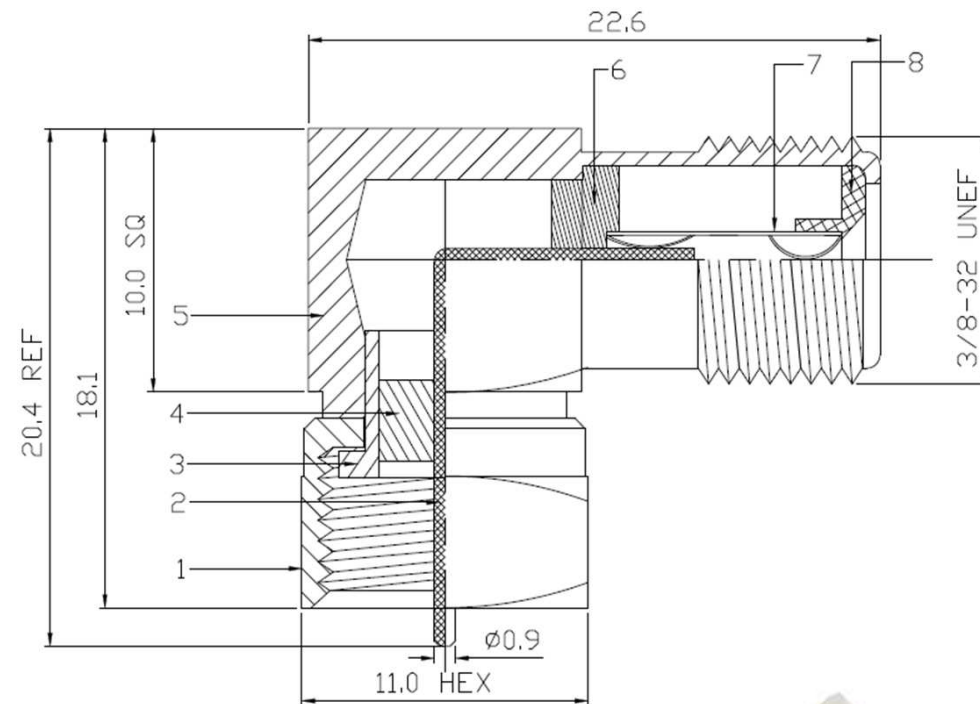
Unit:mm

Specifications:**Electrical:**

Frequency:DC-3GHz
VSWR:1.25:1(Max.)
Insertion Loss:0.3dB(Max.)
Impedance: 75Ohm
Connection: F Male to F Female

Mechanical:

Durability:500 Cycles

**Material:**

Part	Material	Plated
Insulator	Nylon	Blue
Center Contact	Phosphor Bronze	Gold
Insulator	P.A.	
Cover	Brass	Nickel
Center Contact	Brass	Nickel
Body	Brass	Nickel

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:				Woken Technology Inc.	
INTEGRAL DIMENSIONS ± TOLINT		ANGULAR DIMENSIONS ±TOLANG		CODE	DWG TITLE
x	±0.38	.xx	±0.15		3GHz F(M)-F(F) R/A Adapter
.x	±0.25	.xx x	±0.05		
THIRD ANGLE PROJECTION		DRAWN	Terence	SIZE	DWG NO.
		ENGR	Jack	A4	
		APVD	James	REV	
			12/07/07'	A	00600F1F2K701E

4

3

2

1