



00600F2F2MA997

Adapter


3GHz 75Ω F(F)-F(F) Bulkhead Adapter/Nickel

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

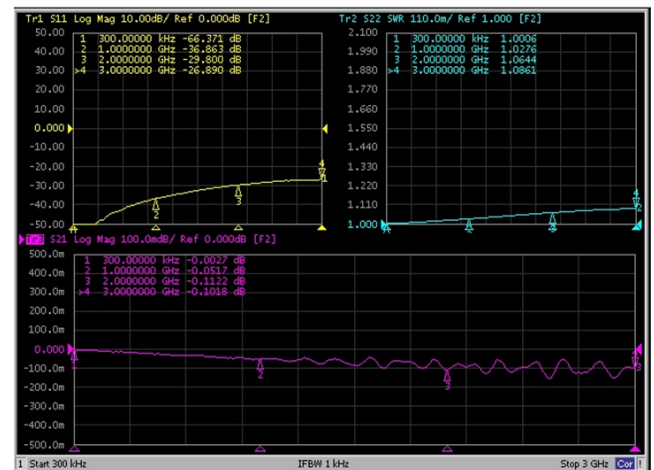

Electrical Specifications

Frequency	DC-3GHz
VSWR	1.2:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	75Ohm
Connection 1	F Female
Connection 2	F Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Center Contact	Beryllium Copper	Gold
Insulator	Polyamide Resin	Yellow
Nut	Brass	Nickel
Washer	Brass	Nickel

Outling Drawing (Unit:mm) Tolerance:±0.2mm

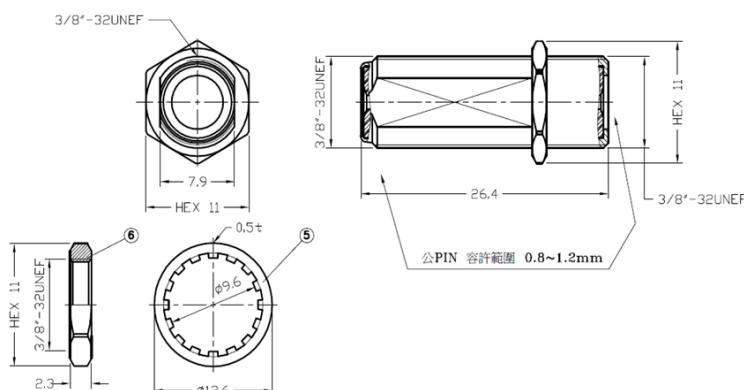

Note: F母頭若使用較大外徑的公PIN 進行插拔後，母針的接觸會被撐開，

若此時再使用外徑較小的公PIN 去插拔，可能會有接觸不全的問題，

因此建議只能由最小的外徑(0.8mm)往最大的外徑(1.2mm)替換