



00600F2L2M9997

Adapter

3GHz 75Ω F(F)–IEC(F)
Adapter/Nickel

Features

- High Repeatability
- Low VSWR

Electrical Specifications

Frequency	DC-3GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	75Ohm
Connection 1	F Female
Connection 2	IEC Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40℃~85℃
-----------------------	----------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Center Contact	Beryllium Copper	Gold
Insulator	Teflon	

Outling Drawing (Unit:mm) Tolerance:±0.4mm

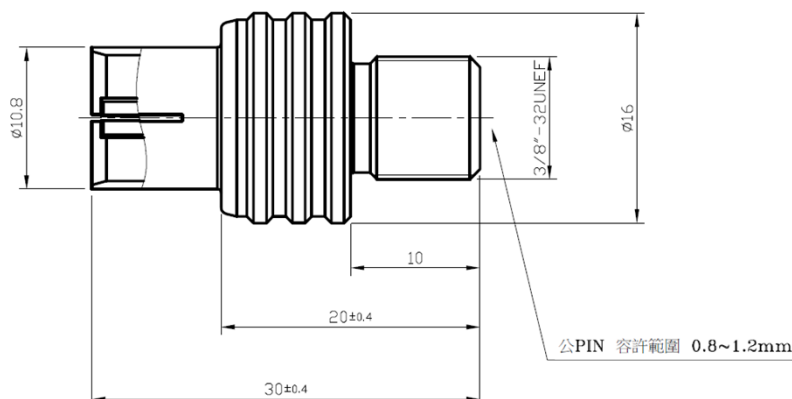

Note: F母頭若使用較大外徑的公PIN 進行插拔後，母針的接觸會被撐開，
若此時再使用外徑較小的公PIN 去插拔，可能會有接觸不全的問題，
因此建議只能由最小的外徑(0.8mm)往最大的外徑(1.2mm)替換

Test Report

