



00600H2H2GA016

Adapter

18GHz 50Ω Mini SMP(F)–Mini SMP(F) Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-18GHz
VSWR	1.15:1(Max.)@DC-18GHz 1.43:1(Max.)@18-26.5GHz
Insertion Loss	0.05dB*√f (GHz)
Impedance	50Ω
Connection 1	Mini SMP Female
Connection 2	Mini SMP Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

Material

Part	Material	Plated
Body	Beryllium Copper	Gold
Center Pin	Beryllium Copper	Gold
Insulator	PTFE	

Outling Drawing (Unit:mm[inch])

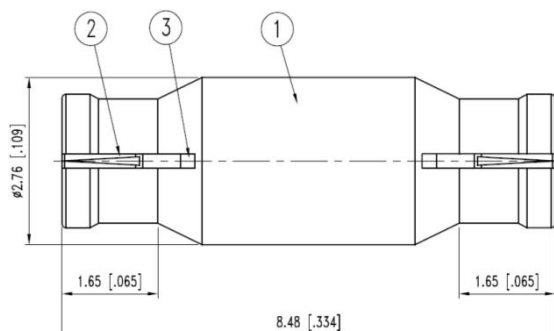

Test Report

