

Features:

High Repeatability
Low VSWR



Specifications:

Electrical:

Frequency:DC-3GHz
VSWR:1.3:1(Max.)
Insertion Loss:0.5dB(Max.)
Impedance: 75Ohm
Connection: BNC Female to N Male



Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

Unit:mm

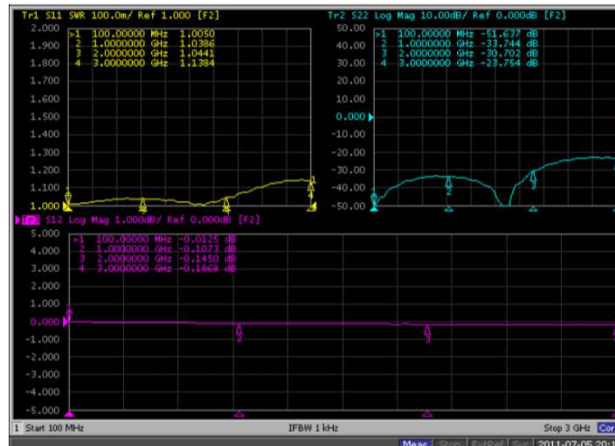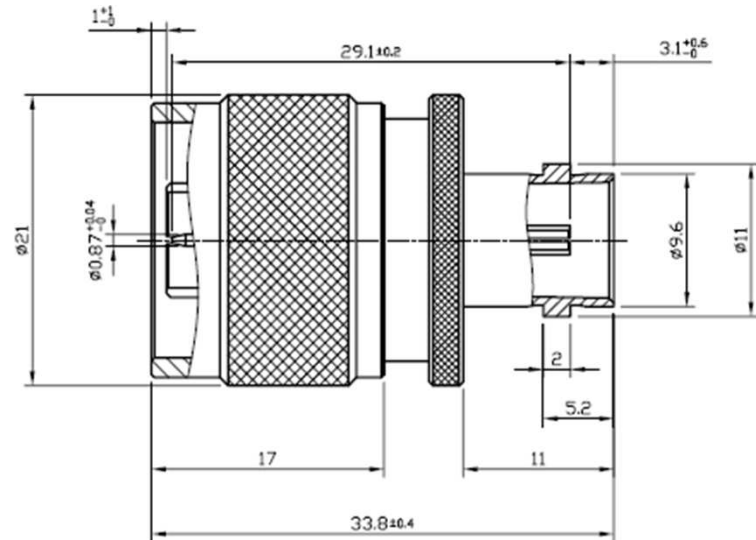

Material:

Part	Material	Plated
Center Pin	Phosphor Bronze	Gold
Inner Retaining Ring	Brass	
Gasket	Silicone	
Insulator	Teflon	
Body	Brass	Nickel
Shell	Brass	Nickel

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

08/15/14'

08/15/14'

08/15/14'



Woken Technology Inc.

CODE

DWG TITLE

75Ω BNC(F)-75Ω N(M) Adapter

SIZE

A4

REV

B

DWG NO.

00600N1D2MA017