

4

3

2

1

Features:

High Repeatability
Low VSWR

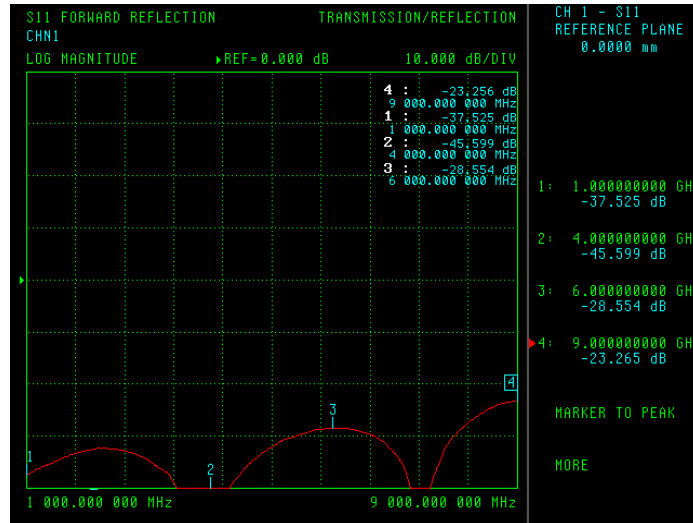
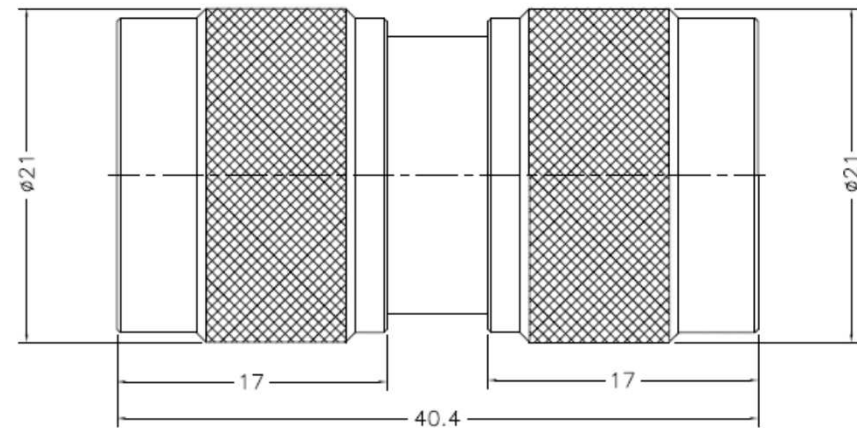
**Specifications:****Electrical:**

Frequency:DC-6GHz
VSWR:1.3:1(Max.)
Insrtion Loss:0.5dB(Max.)
Impedance: 50Ohm
Connection: N Male to N Male

Mechanical:

Durability:500 Cycles

Unit:mm

**Material:**

Part	Material	Plated
Shell	Brass	Nickel
Body	Brass	Nickel
Connector Pin	Brass	Gold
Insulator	Teflon	
Gasket	S.L.Rubber	
Inner Retaining Ring	Brass	Nickel

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

07/21/14'

07/21/14'

07/21/14'



Woken Technology Inc.

CODE

DWG TITLE

6GHz N(M)-N(M) Adapter

SIZE

A4

DWG NO.

00600N1N1NA017

REV

B

4

3

2

1