

4

3

2


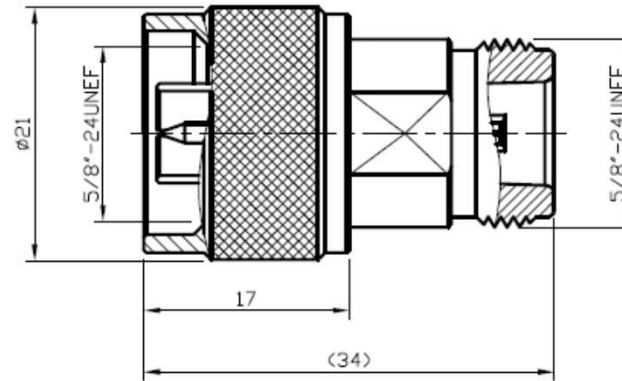
1

**Features:**

High Repeatability  
Low VSWR



Unit:mm

**Specifications:****Electrical:**

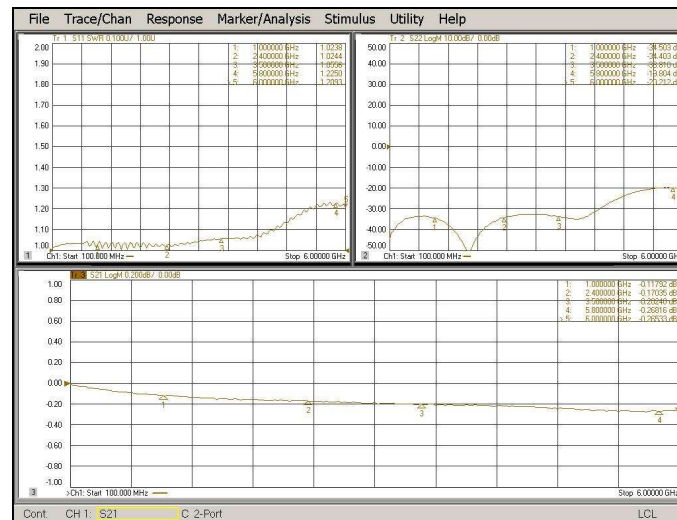
Frequency:DC-6GHz  
VSWR:1.3:1(Max.)  
Insertion Loss:0.5dB(Max.)  
Impedance: 50Ohm  
Connection: N Male to N Female

**Mechanical:**

Durability:500 Cycles

**Enviromental:**

Operating Temperature:-40~85℃

**Material:**


| Part                 | Material        | Plated |
|----------------------|-----------------|--------|
| Shell                | Brass           | Nickel |
| Body                 | Brass           | Nickel |
| Center Pin           | Phosphor Bronze | Gold   |
| Insulator            | Teflon          |        |
| Gasket               | Silicone        |        |
| Inner Retaining Ring | Brass           |        |

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS  
ARE IN mm AND TOLERANCES ARE:

## INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15  
.x ±0.25 .xx x ±0.05

## THIRD ANGLE PROJECTION



## ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

|       |         |           |
|-------|---------|-----------|
| DRAWN | Terence | 07/21/14' |
| ENGR  | Jack    | 07/21/14' |
| APVD  | James   | 07/21/14' |



Woken Technology Inc.

CODE

DWG TITLE

6GHz N(M)-N(F) Adapter

SIZE

A4

REV

C

DWG NO.

00600N1N2NA997

4

3

2

1