

4

3

2

1

Features:

High Repeatability
Low VSWR



Unit:mm

Specifications:**Electrical:**

Frequency:DC-6GHz

VSWR:1.5:1(Max.)

Insertion Loss:0.5dB(Max.)

Impedance: 50Ohm

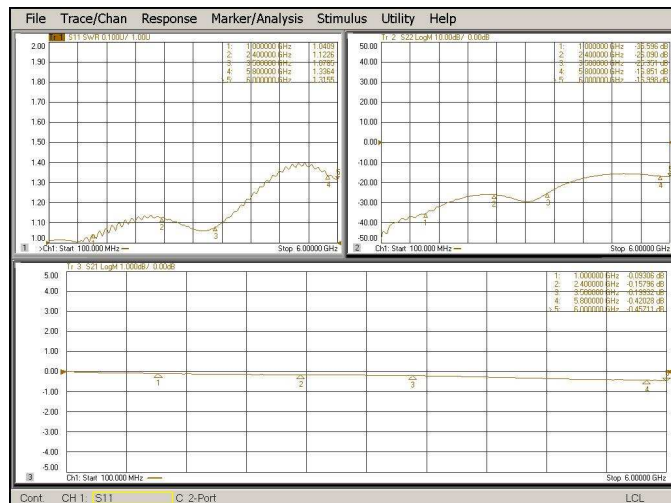
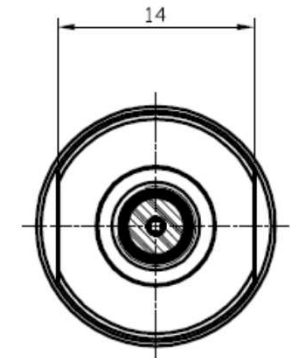
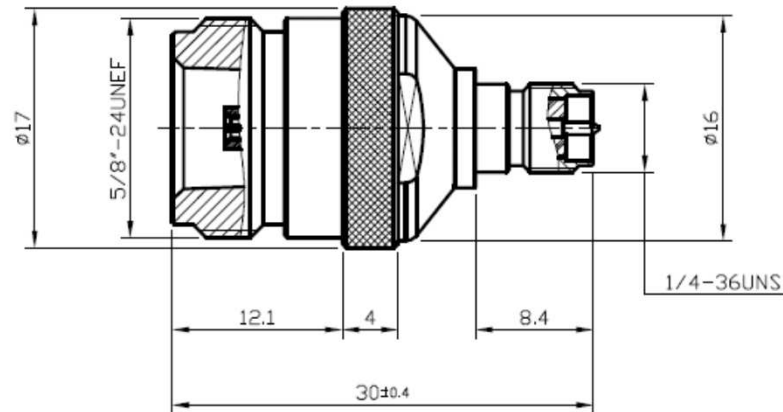
Connection: N Female to Reverse SMA Female

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

**Material:**

Part	Material	Plated
Insulator	Teflon	
Center Pin	Phosphor Bronze	Gold
Body	Brass	Nickel

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

09/04/14'

09/04/14'

09/04/14'



Woken Technology Inc.

CODE

DWG TITLE

6GHz N(F)-Reverse SMA(F) Adapter/Nickel

SIZE

A4

REV

B

DWG NO.

00600N2A5NA017

4

3

2

1