

4

3

2

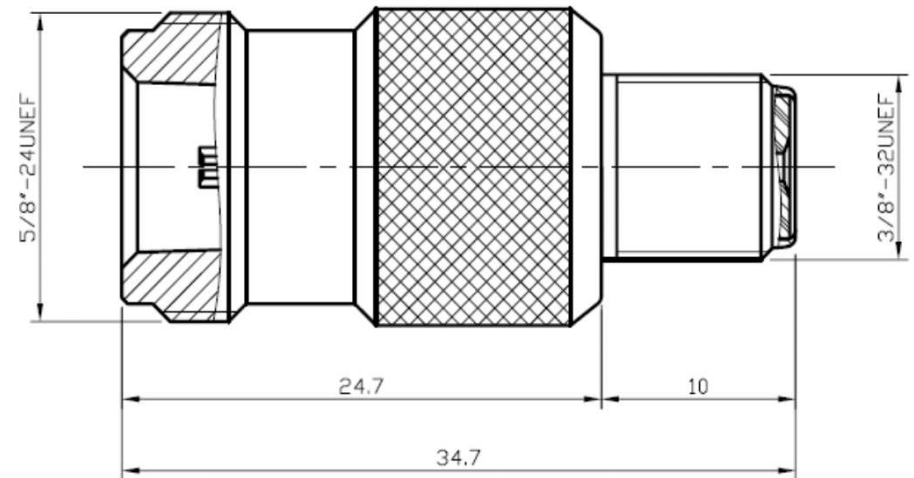
1

Features:

High Repeatability
Low VSWR



Unit:mm

**Specifications:****Electrical:**

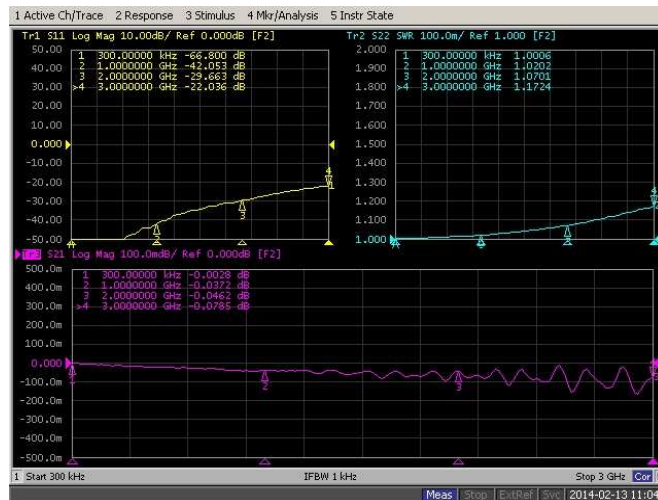
Frequency:DC-3GHz
VSWR:1.3:1(Max.)
Insertion Loss:0.5dB(Max.)
Impedance:75Ohm
Connection: N Female to F Female

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

**Material:**

Part	Material	Plated
Center Contact	Beryllium Copper	Gold
Center Pin	Phosphor Bronze	Gold
Insulator	Teflon	
Body	Brass	Nickel

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN

ENGR

APVD

Terence

Jack

James

07/21/14'

07/21/14'

07/21/14'



Woken Technology Inc.

CODE

DWG TITLE

3GHz 75Ω N(F)-F(F) Adapter

SIZE

A4

REV

B

DWG NO.

00600N2F2M9017