

4

3

2

1

Features:

High Repeatability
Low VSWR



Unit:mm

Specifications:**Electrical:**

Frequency:DC-6GHz

VSWR:1.5:1(Max.)

Impedance: 50Ohm

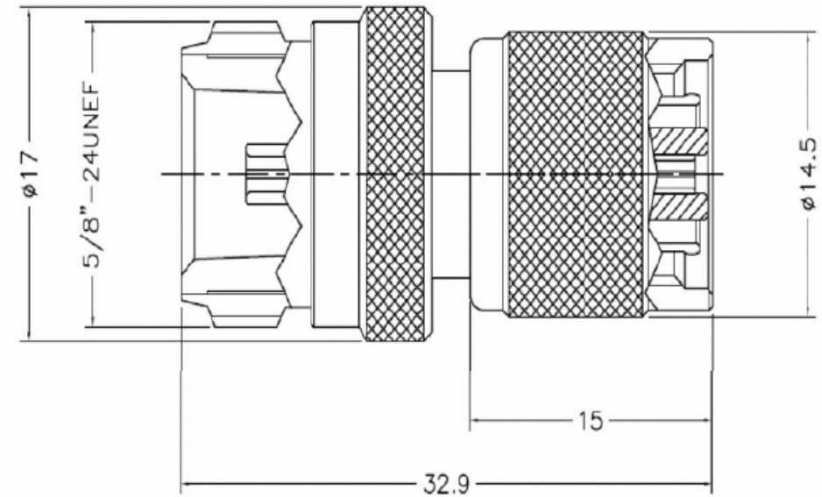
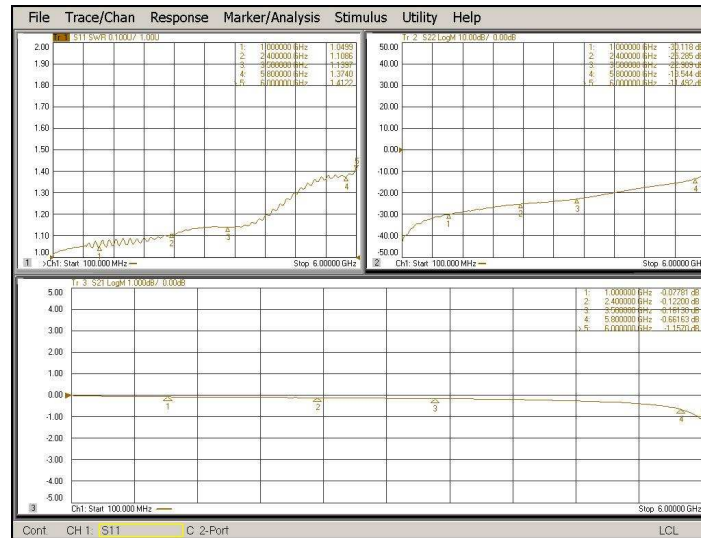
Connection: N female to Reverse TNC Male

Mechanical:

Durability:500 Cycles

Environmental:

Temperature: -40°C~85°C

**Material:**

Part	Material	Plated
Shell	Brass	Nickel
Gasket	S.L Rubber	
Inner Retaining Ring	SK5	Nickel
Washer	Brass	Nickel
Retaining Holder	Brass	
Insulator	Teflon	
Center Pin	Phosphor Bronze	Gold
Body	Brass	Nickel


UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ±TOLINT

x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

THIRD ANGLE PROJECTION



ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

DRAWN

ENGR

APVD

Terence

Jack

James

05/20/12'

05/20/12'

05/20/12'



Woken Technology Inc.

CODE

DWG TITLE

SIZE

A4

REV

B

DWG NO.

00600N2T3NA017

4

3

2

1