



0060A243W-XXXX

Testing Probe

6GHz 50ΩSMA 2Hole Probe Adapter (spring force 250~285g)

Features


- High Repeatability
- Low VSWR



Test Report

Electrical Specifications

Frequency	DC-6GHz
VSWR	1.9:1(Max.)
Insertion Loss	0.8dB(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Probe Tip

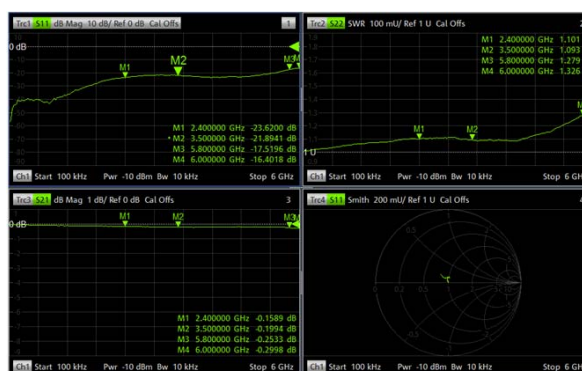

Material

Part	Material	Plated
Signal Conductor	Beryllium Copper	Gold
Shielding Plunger	Brass	Gold
Insulator	Teflon	
Shielding Tube	Brass	Gold
Contact Barrel	Brass	Gold
Spring Signal Conductor	SUS304	
Spring Shielding Plunger	SUS304	



Mechanical

Durability	8K Cycles ※内針可被更換次數:10次
Spring Force	Signal Conductor:250-285g at 2.0mm Shielding Plunger:120g ± 20% at 2.65mm

Outling Drawing (Unit:mm)

Total Length:±0.3mm

DIMENSIONS	TOLERANCES
.X	±0.20
.XX	±0.10
.XXX	±0.05
.X"	±1"

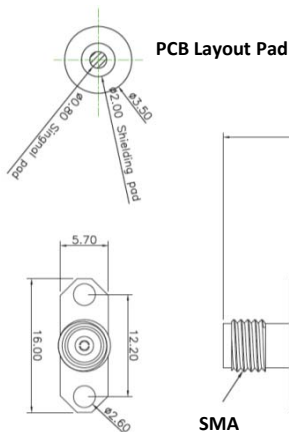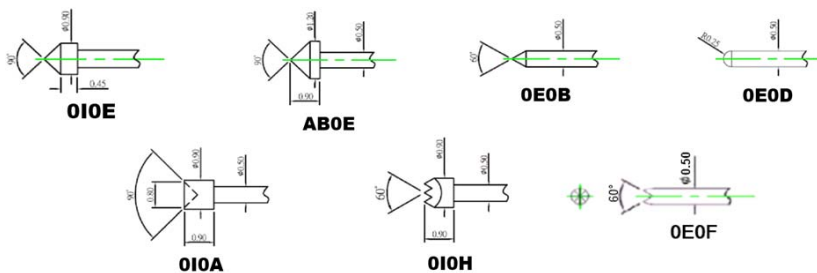

All Specification Changed Without Notification.