



0060A7213-XXXX

Testing Probe

3GHz 50ΩSMA(F) 2Hole Probe Adapter

Features

- High Repeatability
- Low VSWR




Test Report

Electrical Specifications

Frequency	DC-3GHz
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Probe Tip

Material

Part	Material	Plated
Signal Plunger	Beryllium Copper	Gold
Shielding Plunger	Beryllium Copper	Gold
Signal Tube	Phosphor Bronze	Gold
SShielding Tube	Phosphor Bronze	Gold
Insulator	Teflon	
SMA 2hole Body	Brass	Gold

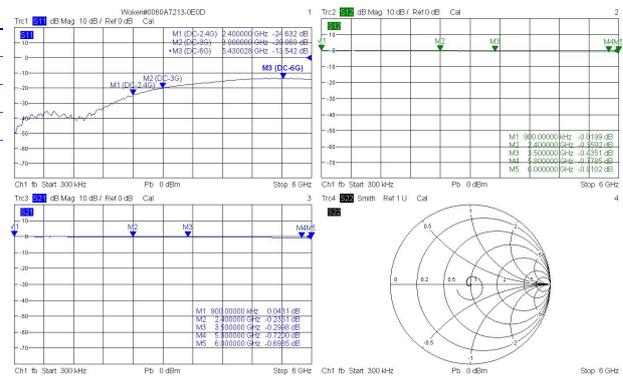


Mechanical

Durability	10K Cycles (0E0B/0E0F) 50K Cycles (0E0D/0I0A) ※内針可被更換次數:10次
Spring Force	Signal Conductor :80g ± 20% at 1.8mm Shielding Plunger:80g ± 20% at 1.8mm
Full Stroke	3mm

Outling Drawing (Unit:mm)

DIMENSIONS	TOLERANCES
.X	±0.20
.XX	±0.10
.XXX	±0.05
.X'	±1'

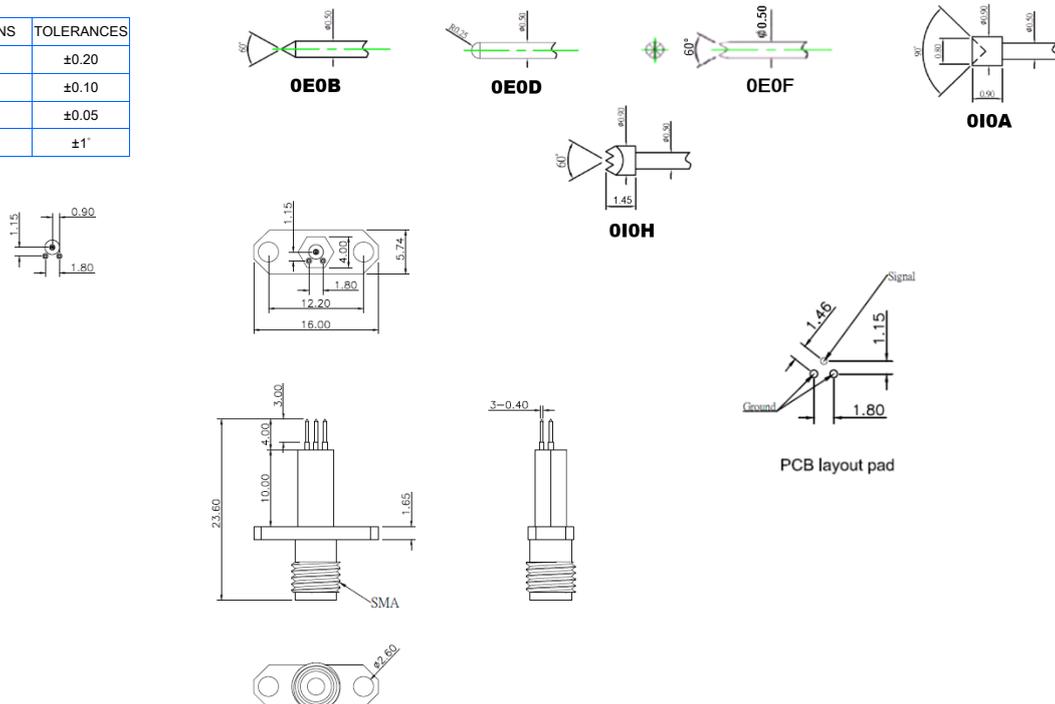

All Specification Changed Without Notification.