



0060A763B-0E0B-01

Testing Probe


6GHz SMA(F)- 0E0B Tip 3pin 2Hole
Probe Adapter (Spring Force: 250g)

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

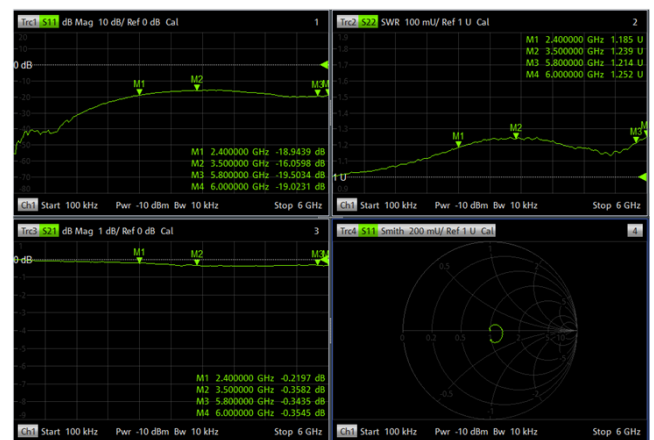

Electrical Specifications

Frequency	DC-6GHz
Return Loss	18dB(Min.)@DC-3GHz, 15dB(Min.)@3-6GHz
Insertion Loss	0.4dB(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Probe Tip

Material

Part	Material	Plated
Replaceable Probes	Beryllium Copper	Gold
Insulator	Teflon	
Housing	Cu/Zn Alloy	Gold



Mechanical

Durability	10K Cycles ※内針可被更換次數:10次
Spring Force	250g $\pm$ 20% at 1.8mm

Outling Drawing (Unit:mm)

Total Length: $\pm$ 0.3mm

DIMENSIONS	TOLERANCES
.X	$\pm$ 0.20
.XX	$\pm$ 0.10
.XXX	$\pm$ 0.05
.X"	$\pm$ 1"

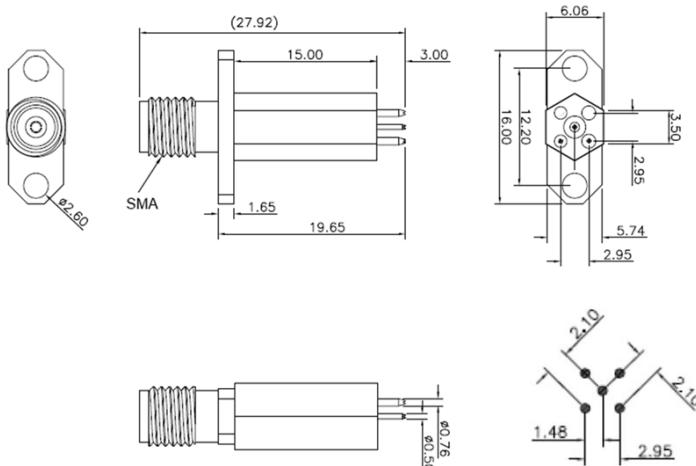

0E0B Type:3.00mm

All Specification Changed Without Notification.