



0060A763B-XXXX

Testing Probe

6GHz 50ΩSMA(F) 3Pin 2Hole Probe Adapter

Features

- High Repeatability
- Low VSWR



Test Report

Electrical Specifications

Frequency	DC-6GHz
Return Loss	18dB(Min.)@DC-3GHz, 15dB(Min.)@3-6GHz
Insertion Loss	0.4dB(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Probe Tip

Material

Part	Material	Plated
Replaceable Probes	Beryllium Copper	Gold
Insulator	Teflon	
Housing	Brass	Gold










Mechanical

Durability	8K Cycles ※内針可被更換次數:10次
Spring Force	250g ± 20% at 1.8mm

Outling Drawing (Unit:mm)

Total Length:±0.3mm

DIMENSIONS	TOLERANCES
.X	±0.20
.XX	±0.10
.XXX	±0.05
.X"	±1"

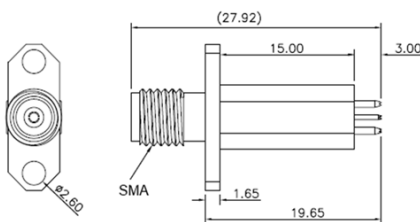

- O10H / O10E / AB0E Type:1.55mm
- O10A Type:1.50mm
- OE0D / OE0F Type:3.00mm

All Specification Changed Without Notification.