



0060A7650-XXXX

Testing Probe

SMA(F)-5pin 2Hole Probe Adapter (Pitch 2.54mm)

Features

- High Repeatability
- Low VSWR



Electrical Specifications

Frequency	DC-6GHz(010E,AB0E,0E0B,0E0D,010A,0E0F)
	DC-3GHz(010H)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Probe Tip

Material

Part	Material	Plated
Signal Spring	SUS	Gold
Signal Plunger	Beryllium Copper	Gold
Insulator	Teflon	
Signal Barrel	Brass	Gold
GND Barrel	Brass	Gold
GND Spring	SUS	
GND Plunger	Beryllium Copper	Gold
SMA Connector	Brass	Gold


Mechanical

Durability	8K Cycles ※内針可被更換次數:10次
Spring Force	Signal: 150g $\pm$ 20% at 2.0mm GND: 150g $\pm$ 20% at 2.0mm

Outling Drawing (Unit:mm)

Total Length: ± 0.3 mm

DIMENSIONS	TOLERANCES
.X	± 0.20
.XX	± 0.10
.XXX	± 0.05
.X'	$\pm 1^\circ$

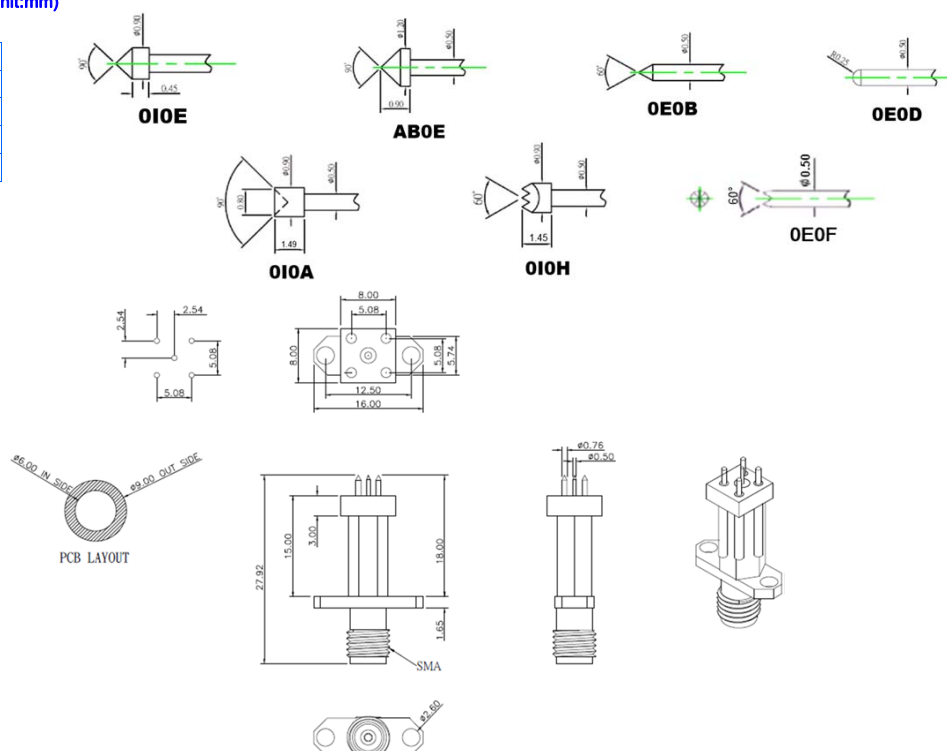

All Specification Changed Without Notification.