



0060MA2AMNS01S

Adapter

20GHz Mini Fakra(P) A Type— SMA(F) Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-20GHz
Return Loss	25dB(Min.)@DC-3GHz
	20dB(Min.)@3-6GHz
	18dB(Min.)@6-20GHz
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Mini Fakra Plug A Type

Mechanical

Durability	500Cycles(Min.)
Engagement Force	≤15N
Retention Force	≥2N


Environmental

Operating Temperature	20°C~26°C
-----------------------	-----------

Material

Part	Material	Plated
Mini Fakra Body	Brass	Gold
Center Pin	Brass	Gold
Insulator	Teflon	
SMA Body	Stainless Steel	Passivated
Spring	Brass	Gold

Outling Drawing (Unit:mm)

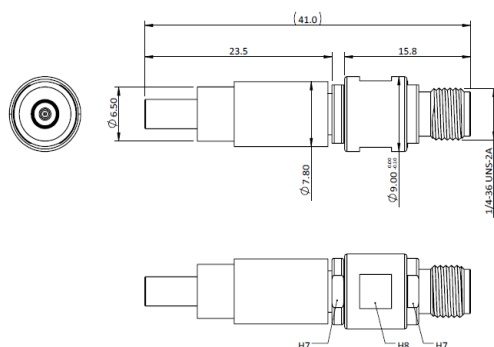

All Specification Changed Without Notification.