



0060WA2A0B501X

Waveguide Adapter

9.84–15GHz 50Ω SMA(F)–WR75(UBR120) Waveguide Adapter

Features

- High Repeatability
- Low VSWR



Electrical Specifications

Frequency	9.84-15GHz
VSWR	1.25:1(Max.)
Insertion Loss	0.3dB(Max.)
Waveguide Size	WR75
Waveguide Flange	UBR120
Coaxial Connection	SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-20°C~60°C
-----------------------	------------



Material

Material	Inner Finishing	Coating
Brass	Nickel	Blue Paint

Test Report

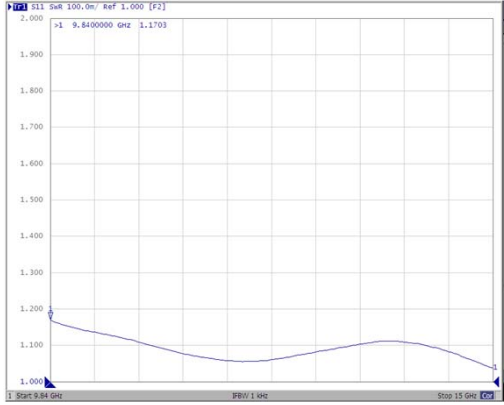

Outling Drawing (Unit:mm)

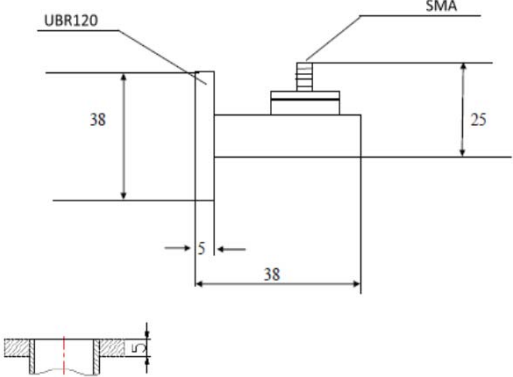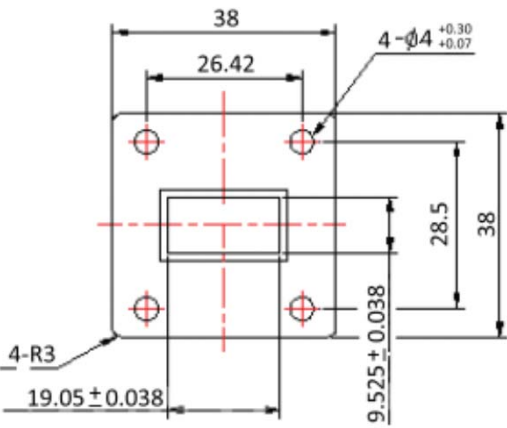

All Specification Changed Without Notification.