



0060WA2BOBB01X

Waveguide Adapter

11.9–18GHz 50Ω SMA(F)–WR62(UBR140) Waveguide Adapter

Features

- High Repeatability
- Low VSWR



Electrical Specifications

Frequency	11.9-18GHz
VSWR	1.25:1(Max.)
Insertion Loss	0.3dB(Max.)
Waveguide Size	WR62
Waveguide Flange	UBR140
Coaxial Connection	SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-20°C~60°C
-----------------------	------------

Material


Material	Inner Finishing	Coating
Brass	Nickel	Blue Paint

Outling Drawing (Unit:mm)

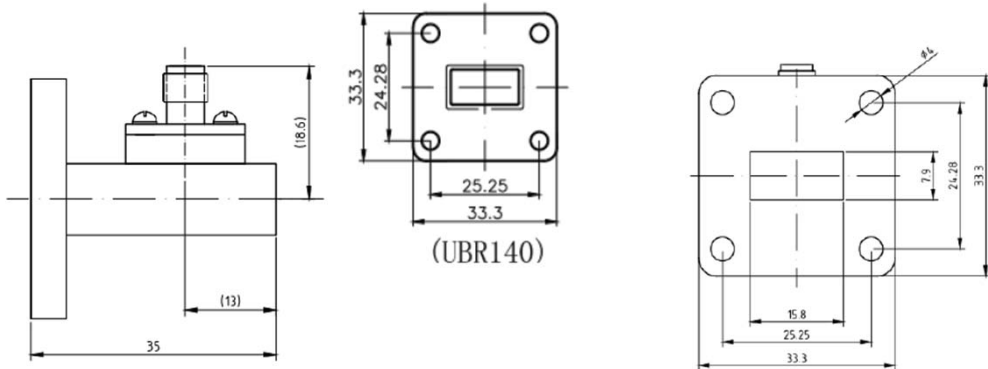

Test Report

The test result is the total IL of two Waveguide to Coax Adapters.

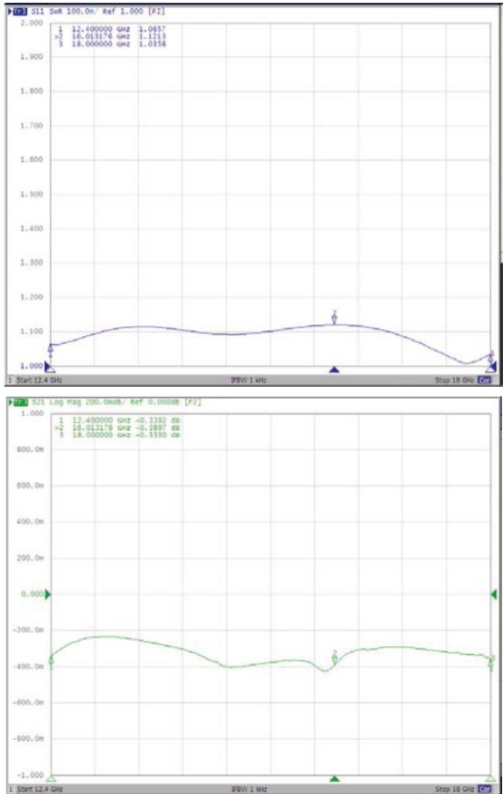

All Specification Changed Without Notification.