



0060WA2COBB01X

Waveguide Adapter

18-26.5GHz 50Ω SMA(F)-
WR42(UBR220) Waveguide Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	18-26.5GHz
VSWR	1.25:1(Max.)
Insertion Loss	0.4dB(Max.)
Waveguide Size	WR42
Waveguide Flange	UBR220
Coaxial Connection	SMA Female

Mechanical

Durability	500 Cycles
------------	------------





Environmental

Operating Temperature	-20°C~60°C
-----------------------	------------

Material

Material	Inner Finishing	Coating
Brass	Gold	Blue Paint

Outling Drawing (Unit:mm)

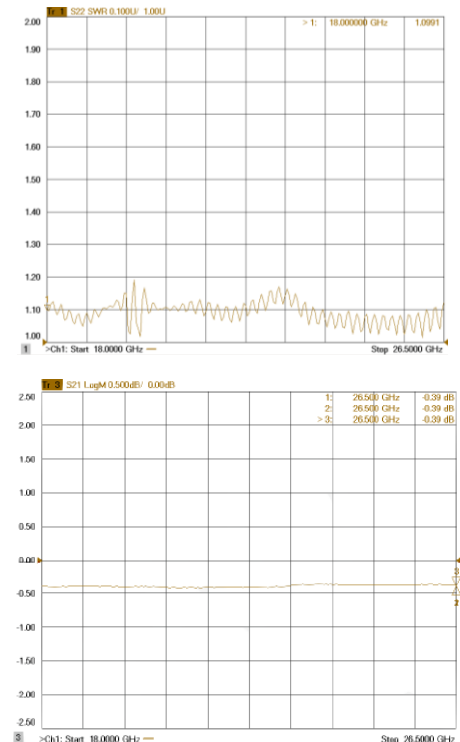

All Specification Changed Without Notification.