




Wake up your further dream.




0060WA2EOBB01X

2.6-3.95GHz 50Ω SMA(F)-WR284(UDR32) Waveguide Adapter

Insertion Loss

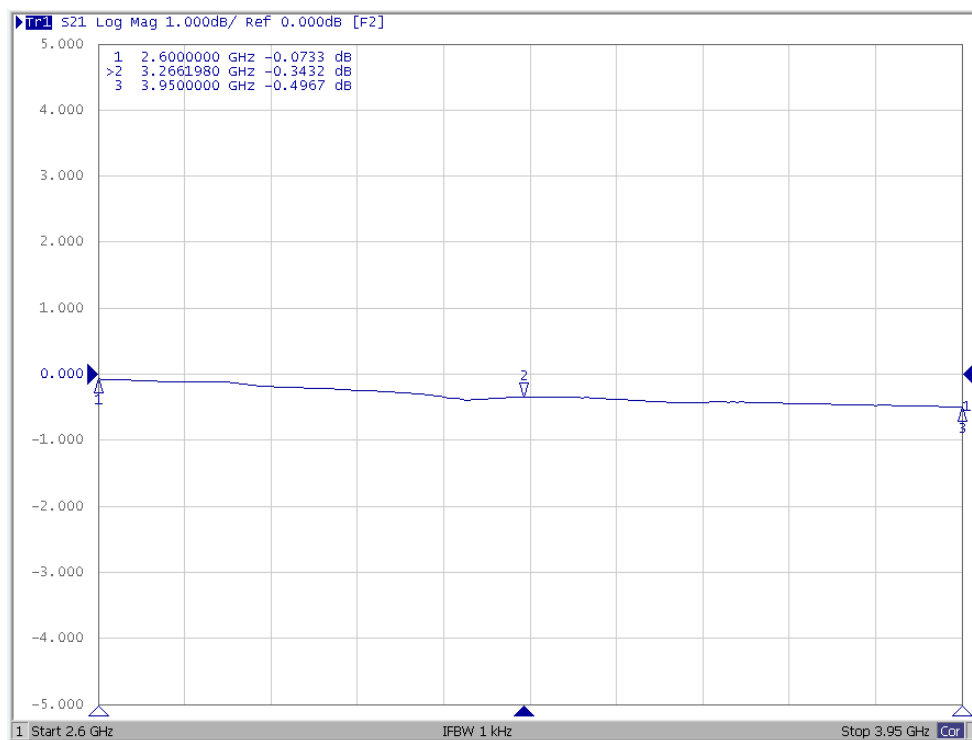

VSWR

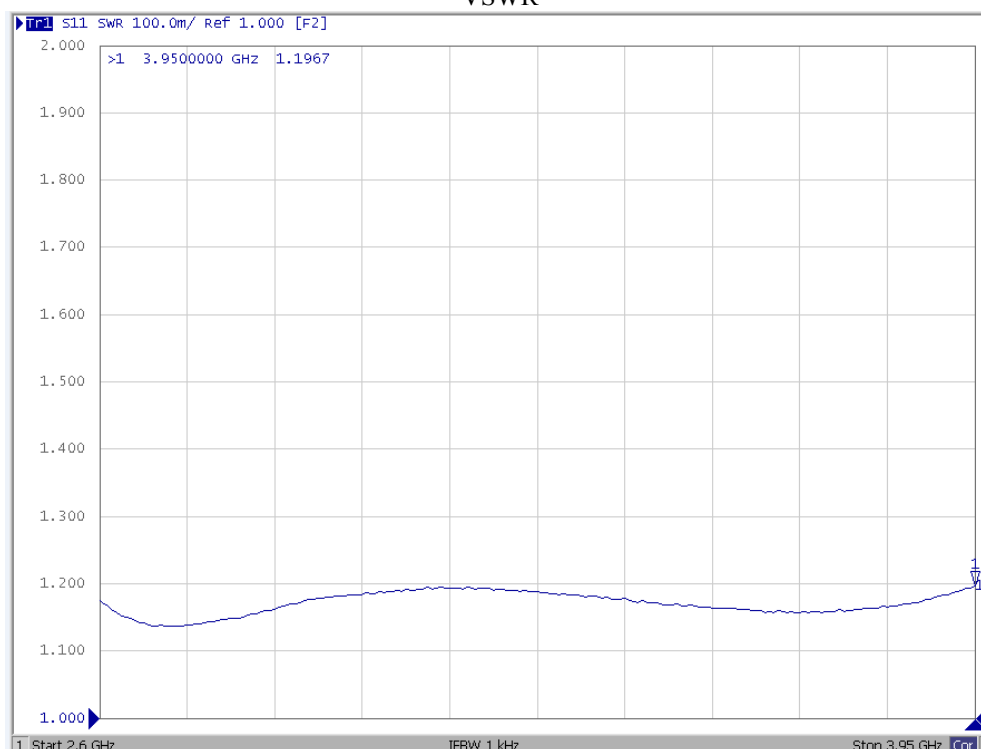

In IL test setup, two Waveguide to Coax Adapters are connected together.

The test result is the total IL of two Waveguide to Coax Adapters.

In calculation, dividing this result by 2 can get single Waveguide to Coax Adapter's IL.