



0060WDOC0BB01X

Waveguide Transition

26.5–40GHz 50Ω WR28(UBR320)–
WR42(UBR220) Waveguide
Transition/Length:50mm

Features

- High Repeatability
- Low VSWR



Electrical Specifications

Frequency	26.5-40GHz
VSWR	1.1:1(Max.)
Waveguide Change	WR28 to WR42
Waveguide Flange	WR28:UBR320 WR42:UBR220

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-20°C~60°C
-----------------------	------------

Material

Material	Inner Finishing	Coating
Brass	Gold	Blue Paint

Test Report

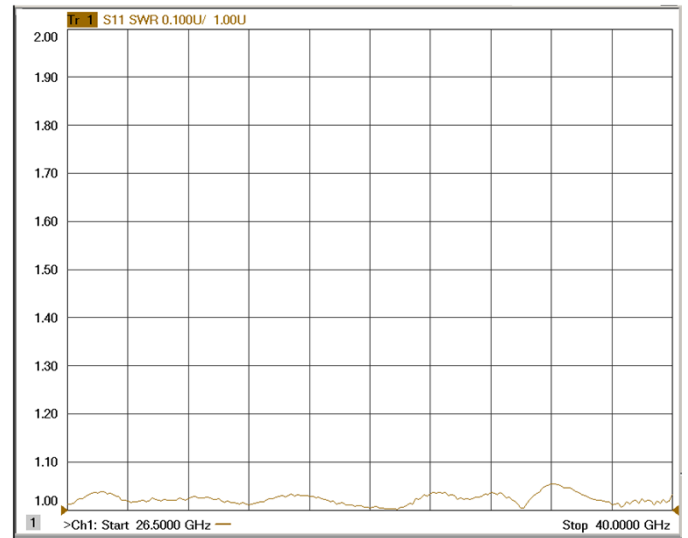

Outling Drawing (Unit:mm)

