



0060WN2FOS599A

Waveguide Adapter

8.2-12.4GHz N(F)-WR90(UBR100) Waveguide Adapter

Features

- ✓ Low Insertion Loss
- ✓ Low VSWR



Electrical Specifications

Frequency	8.2-12.4GHz
VSWR	1.25:1(Max.)
Insertion Loss	0.2dB(Max.)
Waveguide Size	WR90
Waveguide Flange	UBR100
Coaxial Connection	N Female



Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~70°C
-----------------------	------------

Test Report

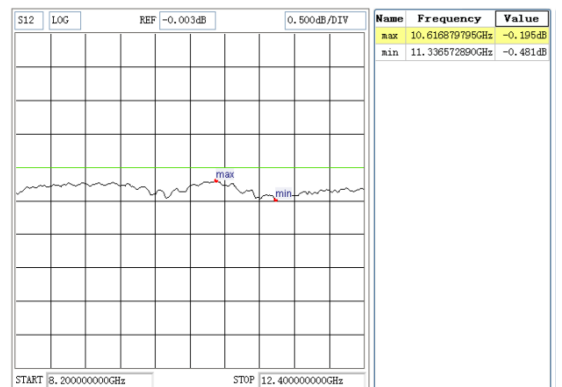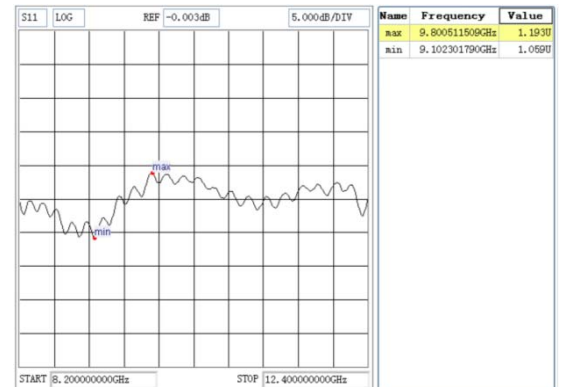

Outling Drawing (Unit:mm)

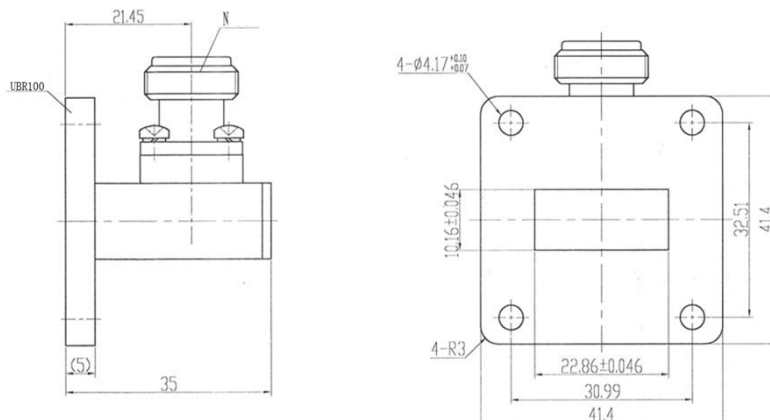

All Specification Changed Without Notification.