

Features:

High Repeatability
Low VSWR




Specifications:

Electrical:

Frequency: 2.17-3.30GHz
Impedance: 50Ohm
VSWR: 1.25:1(Max.)
Insertion Loss: 0.3dB(Max.)
Coaxial Connection: N Female
Waveguide Connection: WR340



Other Type Flange Option please contact sales

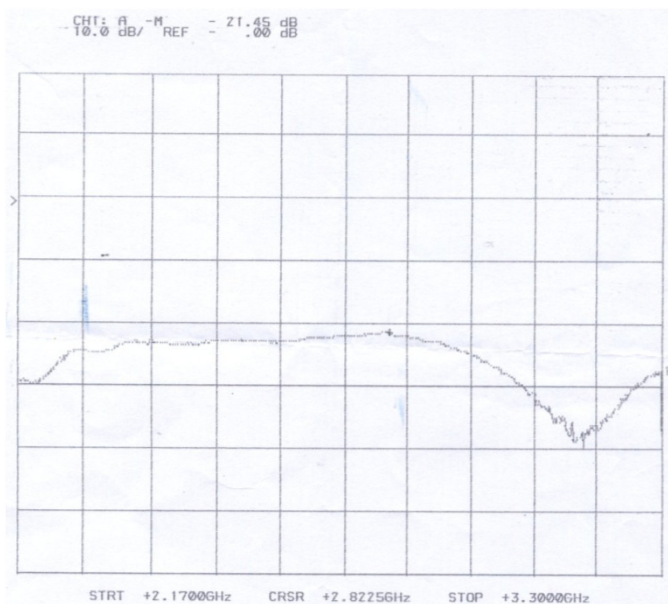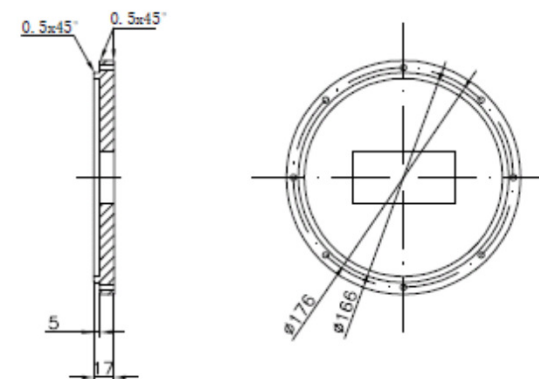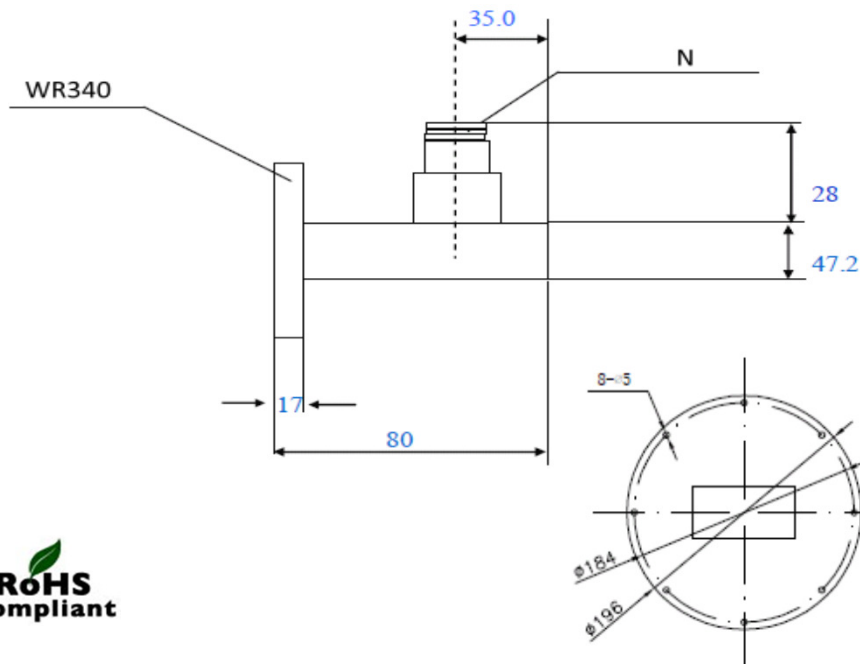

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS ± TOLINT


x ±0.38 .xx ±0.15

.x ±0.25 .xx x ±0.05

ANGULAR DIMENSIONS ±TOLANG

HOLES UNDER Ø5.0 ±0.05

THIRD ANGLE PROJECTION



DRAWN	Terence	05/03/10'
ENGR	Jack	05/03/10'
APVD	James	05/03/10'



Woken Technology Inc.

CODE

DWG TITLE

2.17-3.30GHz N(F)-WR340

SIZE

Waveguide Adapter

REV

DWG NO.

0060WWON2NB02X