




0066A743H-0I0A

Testing Probe

8GHz 50ΩSMA(F)-0I0A Tip 2Hole Probe Adapter

Features


- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-8GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	Probe Tip

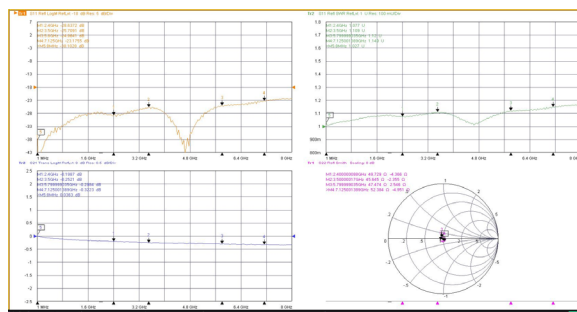

Material

Part	Material	Plated
Signal Conductor	Beryllium Copper	Gold
Shielding Plunger	Brass	Gold
Insulator	Teflon	
Shielding Tube	Brass	Gold
Contact Barrel	Brass	Gold
Spring Signal Conductor	SUS304	Gold
Spring Shielding Plunger	SUS304	

Mechanical

	8K Cycles ※内針可被更換次數:10次
Spring Force	Signal Conductor:120g ± 20% at 1.8mm Shielding Plunger:300g ± 20% at 1.80mm
FullStroke	2.30mm

Outling Drawing (Unit:mm)

Total Length:±0.3mm

DIMENSIONS	TOLERANCES
.X	±0.20
.XX	±0.10
.XXX	±0.05
.X'	±1°

