



00700A1AP0501N

Termination


8GHz 50Ω SMA(M) 5W Termination

Features

- ✓ Small Size
- ✓ Lightweight
- ✓ Low VSWR



Test Report

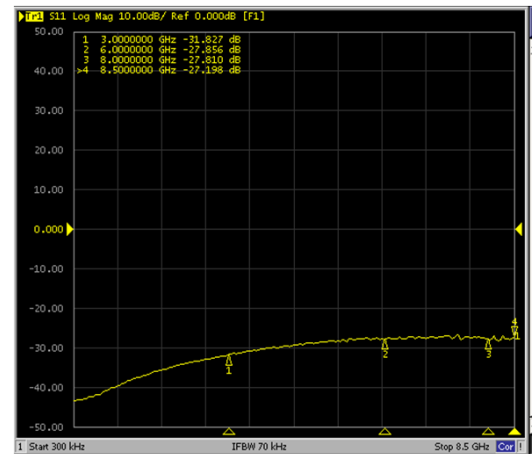

Electrical Specifications

Frequency	DC-8GHz
Return Loss	23dB(Min.)
DC Input Voltage	335V(Max.)
Rated Power	5W
Impedance	50Ohm
Connection	SMA Male

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-55°C~150°C
-----------------------	-------------

Material

Part	Material	Plated
Connector	Stainless Steel	
Center Pin	Tin Bronze	Gold
Insulator	Teflon	
Housing	Brass	Nickel

Outling Drawing (Unit:mm)

