



00700A1AQ0501Y

Termination


3.5GHz 50Ω SMA(M) 5W Termination

Features

- ✓ Small Size
- ✓ Lightweight
- ✓ Low VSWR



Test Report

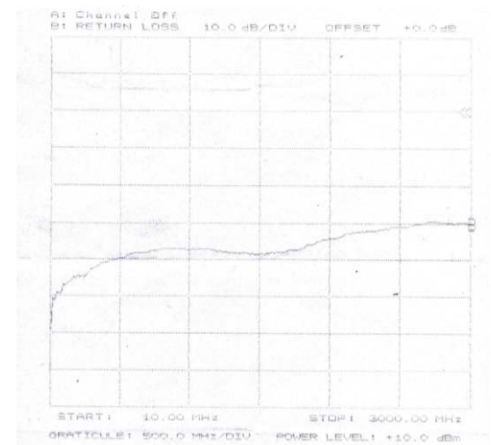

Electrical Specifications

Frequency	DC-3.5GHz
VSWR	1.15:1(Max.)
Input Power	5W(Avg.)@25°C (Derated Linearly to 0.5W @125°C)
Peak Poewer	200W(Max.) (5μsec Pluse,0.2% Duty Cycles)
Impedance	50Ohm
Connection	SMA Male


Mechanical

Durability	500 Cycles
------------	------------

Material

Part	Material	Plated
Outer Conductor	Brass	Nickel
Center Pin	Brass	Gold

Outling Drawing (Unit:mm) Tolerance:±5%

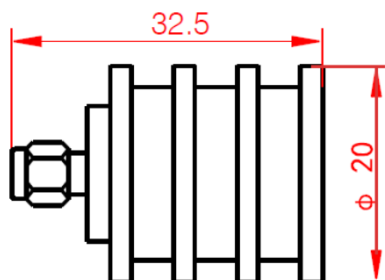

All Specification Changed Without Notification.