



00700N1AEE001F

Termination

4GHz 50Ω N(M) 500W Termination

Features

- ✓ Small Size
- ✓ Lightweight
- ✓ Low VSWR

Electrical Specifications

Frequency	DC-4GHz
VSWR	1.2:1(Max.)
Rated Power	500W@25°C
Impedance	50Ω
Connection	N Male

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connector	Brass	Tri-Metal
Center Pin	Brass	Gold

Outling Drawing (Unit:mm)

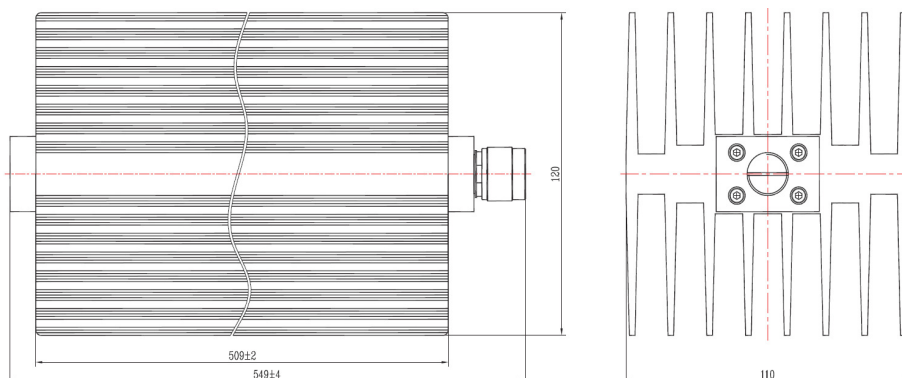

All Specification Changed Without Notification.