




00700N1AP0501N

Termination


8GHz 5W N(M) 50Ω Termination

Features

- ✓ Small Size
- ✓ Lightweight
- ✓ Low VSWR



Test Report

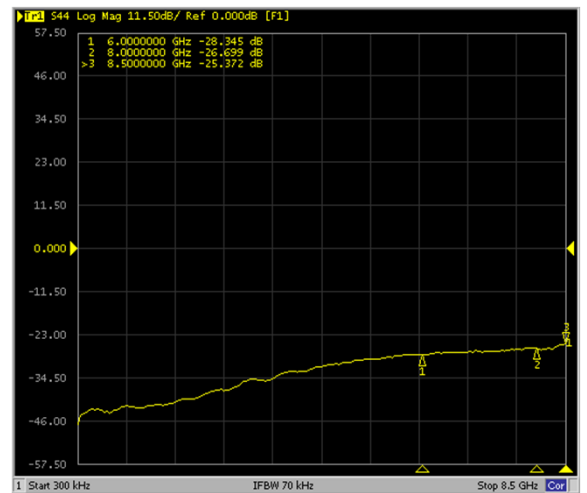

Electrical Specifications

Frequency	DC-8GHz
Return Loss	23dB(Min.)@DC-6GHz 20.8dB(Min.)@6-8GHz
Rated Power	5W
Working Voltage	335V (Max.)
Impedance	50Ohm
Connection	N Male

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-55°C~150°C
-----------------------	-------------

Material

Part	Material	Plated
Connector	Brass	Tri-Metal
Center Pin	Tin Bronze	Gold
Insulator	PTFE	
Housing	Brass	Tri-Metal

Outling Drawing (Unit:mm)

