



# 00700N1AQ2501N

## Termination


### 3.5GHz 50Ω N(M) 25W Termination

#### Features

- ✓ Small Size
- ✓ Lightweight
- ✓ Low VSWR



#### Test Report

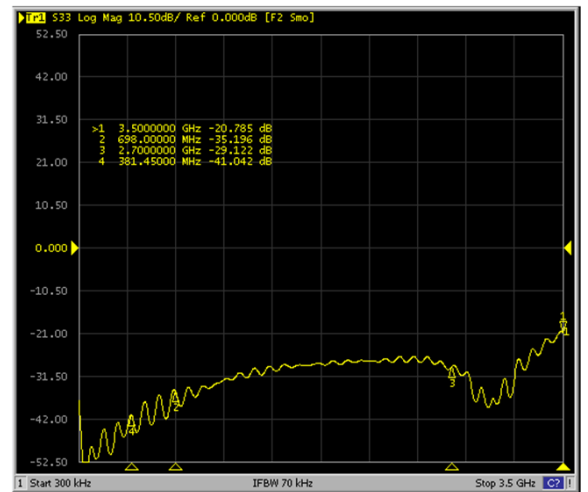

#### Electrical Specifications

Frequency	DC-3.5GHz
Return Loss	20dB(Min.)
Rated Power	25W
Working Voltage	335V (Max.)
Impedance	50Ohm
Connection	N Male

#### Mechanical

Durability	500 Cycles
------------	------------

#### Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

#### Material

Part	Material	Plated
Connector	Brass	Tri-Metal
Center Pin	Tin Bronze	Silver
Insulator	PTFE	
Housing	Aluminum	Black

#### Outling Drawing (Unit:mm)

