



00800A1G02M-XX

Attenuator

6GHz SMA 5W Fixed Attenuator

Features

- ✓ Small Size
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-6GHz
Standard Values	3,5,6,10,20,30,40dB
Attenuation Accuracy	3,5,6,10 dB $\pm$ 0.4dB
	20,30dB : $\pm$ 0.5dB
	40dB : $\pm$ 1.0dB
VSWR	1.25:1(Max.)
Average Power	5W@25°C
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-40°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connector	Stainless Steel	Passivated
Center Conductor	Beryllium Copper	Gold
Housing	Anodized Aluminum	

Outling Drawing (Unit:mm)

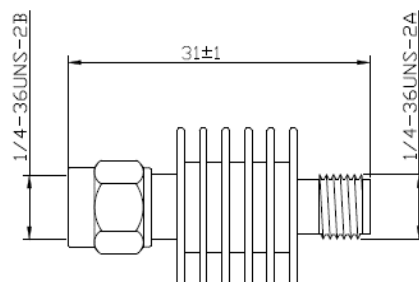

Test Report

