



00800A1G05H-XX

Attenuator

6GHz SMA 25W Fixed Attenuator


Features

- ✓ Small Size
- ✓ Low VSWR



Test Report

10dB

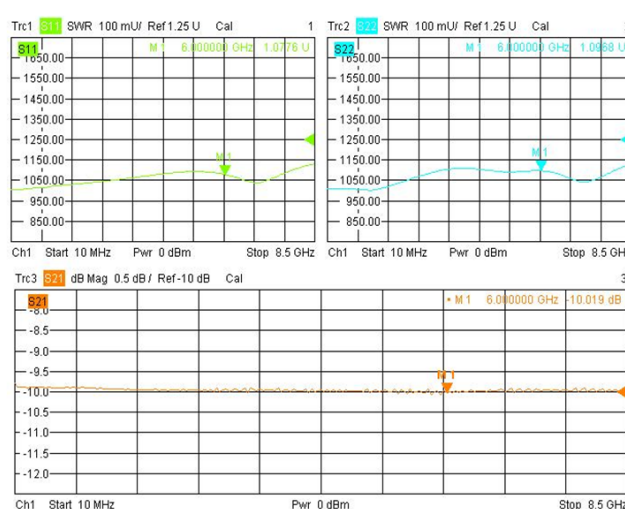

Electrical Specifications

Frequency	DC-6GHz
Standard Values	3,6,10,20,30,40dB
Attenuation Accuracy	3,6,10 dB: $\pm 0.5\text{dB}$
	20dB : $\pm 0.6\text{dB}$
	30,40dB : $\pm 0.8\text{dB}$
VSWR	1.25:1(Max.)
Average Power	25W@25°C
Impedance	50Ohm
Input Connection	SMA Male
Output Connection	SMA Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connector	Brass	Tri-Metal

Outling Drawing (Unit:mm)

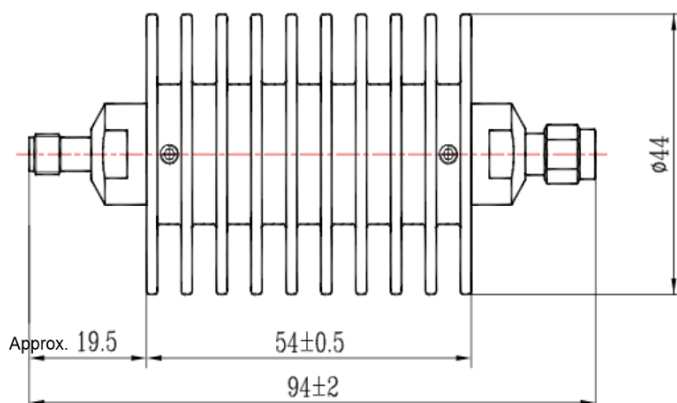

All Specification Changed Without Notification.