



00800A1J01H-XX

Attenuator


12.4GHz SMA 2W Fixed Attenuator

Features

- ✓ Small Size
- ✓ Low VSWR



Test Report

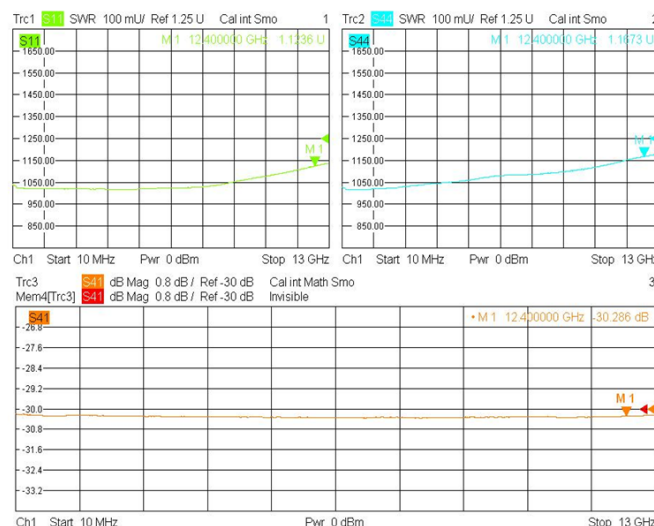

Electrical Specifications

Frequency	DC-12.4GHz
Standard Values	1,3,5,6,10,20,30,40dB
Attenuation Accuracy	1,3,5,6,10 dB: ± 0.6 dB 20dB : ± 0.7 dB 30,40dB : ± 0.9 dB
VSWR	1.25:1(Max.)
Average Power	2W@25°C
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	SMA Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connector	Stainless Steel	

Outling Drawing (Unit:mm)

