



00800A1N01R-XX

Attenuator

8GHz 2W SMA Fixed Attenuator


Features

- ✓ Small Size
- ✓ Low VSWR



Test Report

20dB:

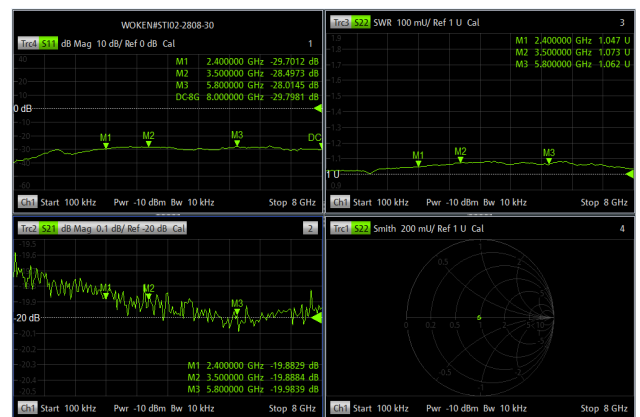

Electrical Specifications

Frequency	DC-8GHz
Standard Values	1,3,5,6,9,10,20,30dB
Attenuation Accuracy	1,3,5,6,9,10,20 dB: ± 0.6 dB 30dB : ± 0.8 dB
VSWR	1.2:1(Max.)
Average Power	2W@25°C
Impedance	50Ohm
Input Connection	SMA Male
Output Connection	SMA Female

Material

Part	Material	Plated
Body	Stainless	


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-65°C~125°C
-----------------------	-------------

Outling Drawing (Unit:mm(inch))

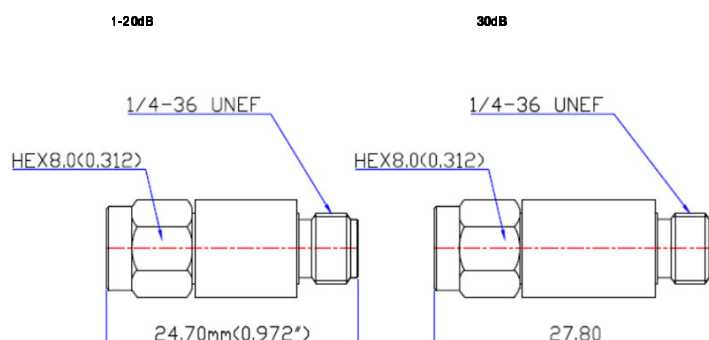

All Specification Changed Without Notification.