



00800F2A01C-02

Attenuator


5-1000MHz F 2dB Fixed Attenuator

Features

- ✓ Small Size
- ✓ Low VSWR



Test Report

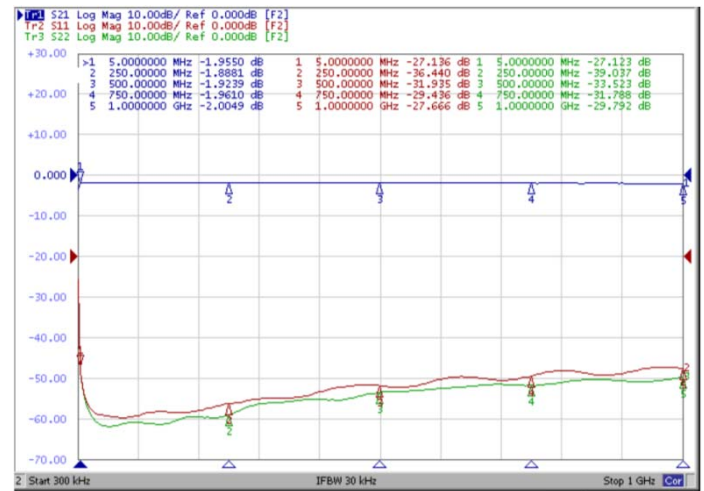

Electrical Specifications

Frequency	5-1000MHz
Attenuation	2dB
Attenuation Accuracy	±0.5dB(Max.)
Return Loss	20dB(Typ.) 18dB(Min.)
Impedance	75Ohm
Connection	F

Mechanical

Durability	500 Cycles
------------	------------

Outling Drawing (Unit:mm)

DIMENSIONS	TOLERANCES
1~4mm	±0.10
4~16mm	±0.15
16~63mm	±0.20
63mm ↑	±0.30

