




00800F2D01L-XX

Attenuator

3GHz 75Ω F 2W Fixed Attenuator

Features

- ✓ Small Size
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-3GHz
Standard Values	1,2,3,5,6,10,15,16,20,30dB
Attenuation Accuracy	1,2,3,5,6dB:±0.5dB
	10,15,16dB:±0.7dB
	20,30dB:±1.0dB
VSWR	1.3:1(Max.)
Average Power	2W @25°C
Impedance	75Ohm
Connection	F Male-F Female


Mechanical

Durability	500 Cycles
------------	------------

Material

Part	Material	Plated
Outer Conductor	Brass	Nickel
Center Pin	Brass	Gold


Outling Drawing (Unit:mm)

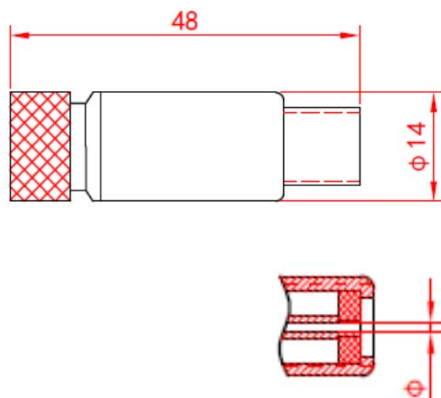

Note.F Male Pin Size:1mm±0.05mm

F母頭只可插入直徑0.8-1mm的針,F端螺紋為3/8"-32,為英制標準(Imperial Unites)

Test Report

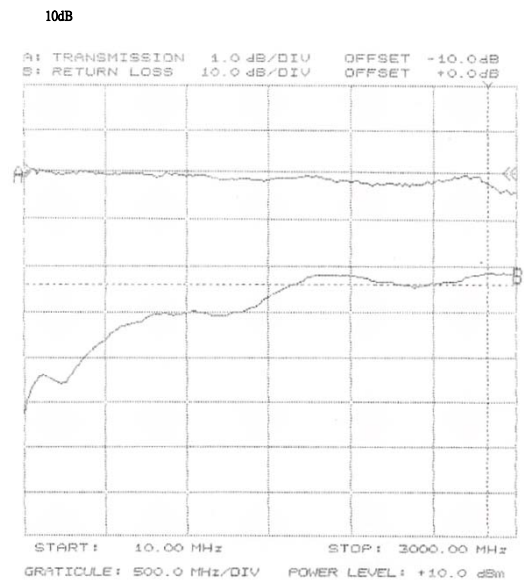

All Specification Changed Without Notification.