



00800N1B06H-XX

Attenuator

2GHz N 50W Fixed Attenuator / two way

Features

- ✓ Small Size
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-2GHz
Standard Values	1,2,3,6,10,20,30dB
Attenuation Accuracy	1,2,3,6,10 dB: $\pm 0.4\text{dB}$ 20dB : $\pm 0.5\text{dB}$ 30dB : $\pm 0.7\text{dB}$
VSWR	1.2:1(Max.)
Average Power	Fwd.50W@25°C ,Rev.50W
Impedance	50Ohm
Connection 1	N Male
Connection 2	N Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connector	Brass	Nickel

Outling Drawing (Unit:mm)

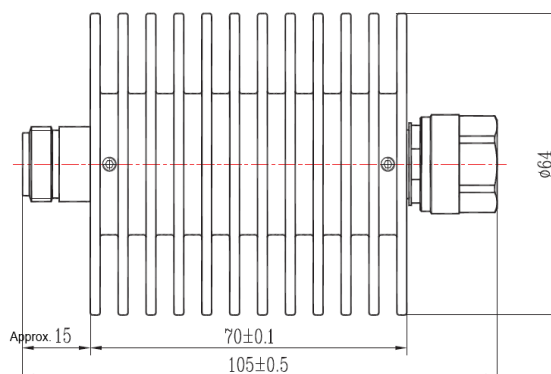

Test Report

