



00800N1D03H-XX

Attenuator

3GHz N 10W Fixed Attenuator


Features

- ✓ Small Size
- ✓ Low VSWR



Test Report

20dB:

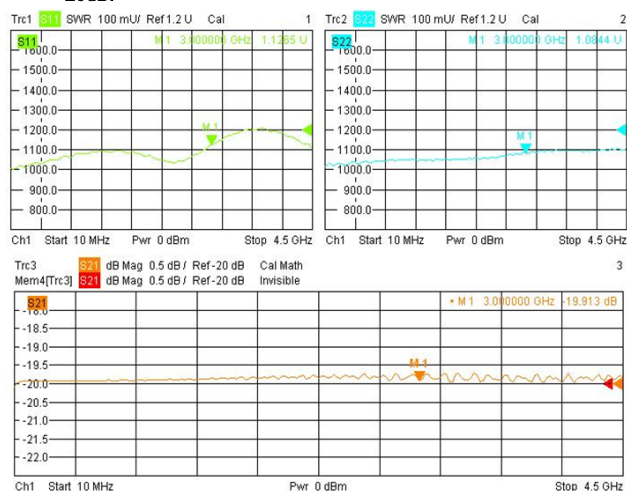

Electrical Specifications

Frequency	DC-3GHz
Standard Values	2,3,6,10,20,30,40dB
Attenuation Accuracy	2,3,6,10 dB: $\pm 0.4\text{dB}(\text{Max.})$ 20dB : $\pm 0.5\text{dB}(\text{Max.})$ 30dB : $\pm 0.6\text{dB}(\text{Max.})$ 40dB : $\pm 0.7\text{dB}(\text{Max.})$
VSWR	1.20:1(Max.)
Average Power	10W@25°C
Impedance	50Ohm
Connection 1	N Male
Connection 2	N Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connection	Brass	Tri-Metal

Outling Drawing (Unit:mm)

