




00800N1D06H-XX

Attenuator

3GHz N 100W Fixed Attenuator

Features

- ✓ Small Size
- ✓ Low VSWR



Electrical Specifications

Frequency	DC-3GHz
Standard Values	3,6,10,20,30dB
Attenuation Accuracy	3,6,10 dB: $\pm 0.5\text{dB}$
	20dB : $\pm 0.6\text{dB}$
	30dB : $\pm 0.8\text{dB}$
VSWR	3,6,10,20dB: 1.25:1(Max.)
	30dB: 1.2:1(Max.)
Average Power	100W
Impedance	50Ohm
Input Connection	N Male
Output Connection	N Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connector	Brass	Nickel

Outling Drawing (Unit:mm)

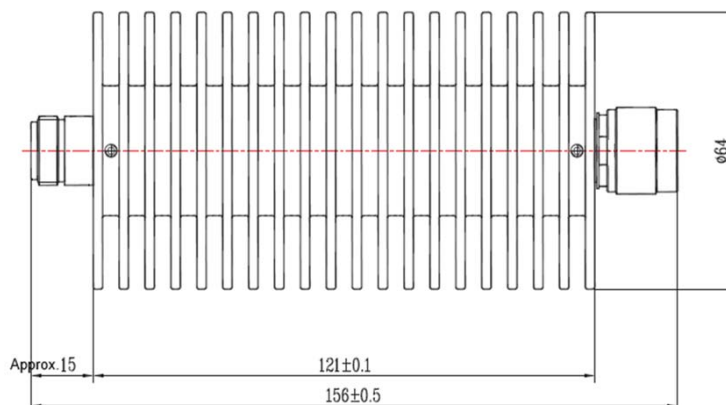

Test Report

