




00800N1D20H-XX

Attenuator

3GHz N 500W Fixed Attenuator


Features

- ✓ Small Size
- ✓ Low VSWR

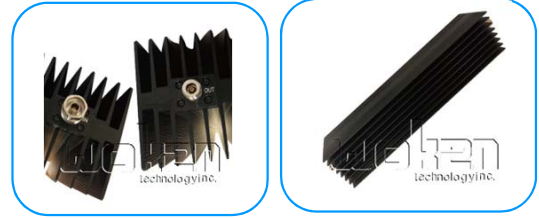

Test Report

40dB:

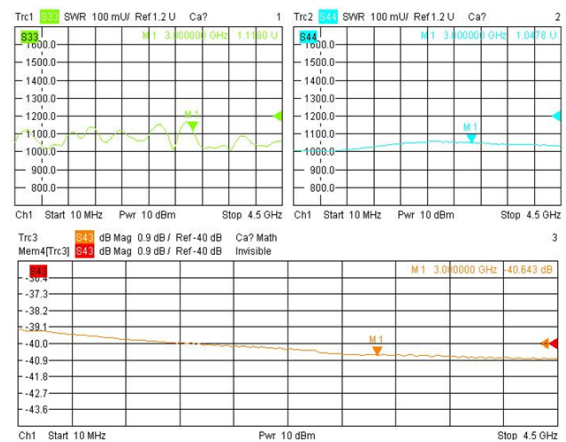

Electrical Specifications

Frequency	DC-3GHz
Standard Values	3,5,6,10,20,30,40dB
Attenuation Accuracy	3,6,10dB:±1.5dB , -0.6dB 20dB:±1.2dB 5,30,40dB:±1.0dB
VSWR	1.25:1(Max.)
Average Power	500W @25°C
Impedance	50Ohm
Input Port	N Male
Output Port	N Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental


Operating Temperature	-55°C~125°C
-----------------------	-------------

Material


Part	Material	Plated
Connection	Brass	Nickel

Outling Drawing (Unit:mm)


6,10,20,20,40dB:

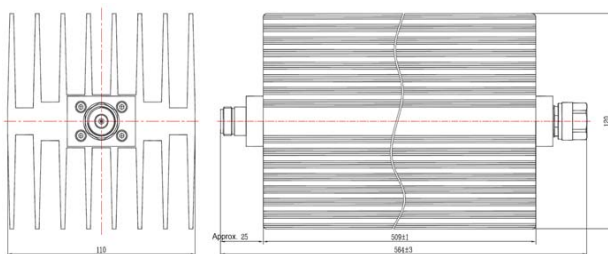

3dB:

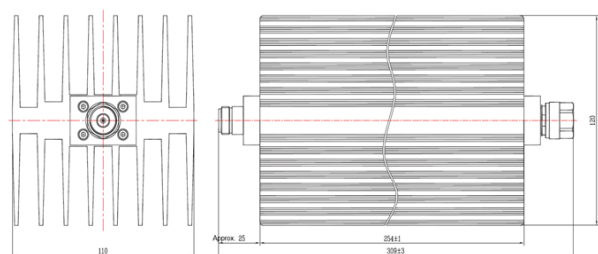

5dB:

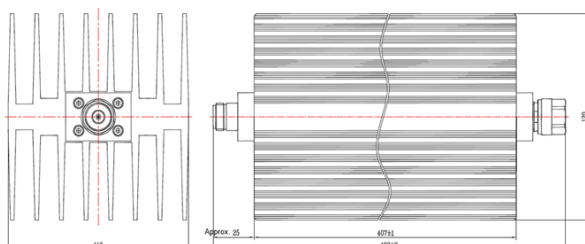

All Specification Changed Without Notification.