



00800N1G03H-XX

Attenuator

6GHz N 10W Fixed Attenuator


Features

- ✓ Small Size
- ✓ Low VSWR



Test Report

20dB:

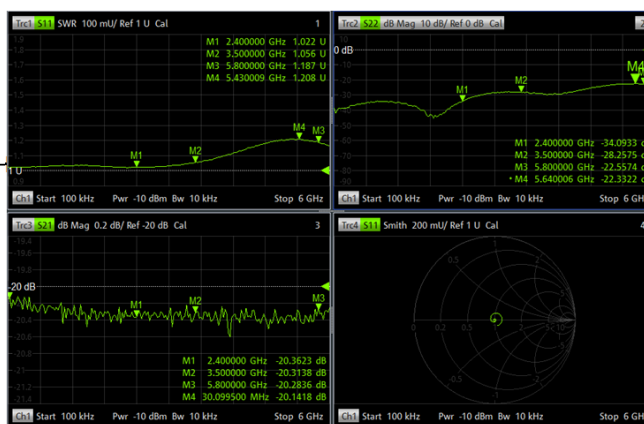

Electrical Specifications

Frequency	DC-6GHz
Standard Values	3,5,6,10,20,30,40dB
Attenuation Accuracy	3,5,6,10dB:± 0.4dB@DC-4GHz,± 0.5dB@4-6GHz 20dB :± 0.5dB@DC-4GHz,± 0.6dB@4-6GHz 30dB :± 0.6dB@DC-4GHz,± 0.8dB@4-6GHz 40dB :± 0.7dB@DC-4GHz,± 0.8dB@4-6GHz
VSWR	1.2:1(Max.)@DC-4GHz,1.25:1(Max.)@4-6GHz
Average Power	10W @25°C
Impedance	50Ohm
Connection 1	N Male
Connection 2	N Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connection	Brass	Tri-Metal

Outling Drawing (Unit:mm)

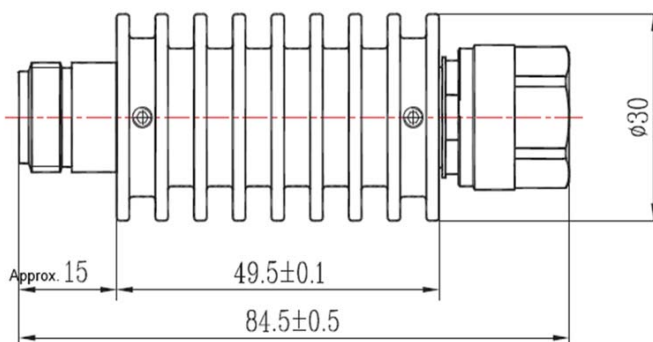

All Specification Changed Without Notification.