



00800N1G05H-XX-01

Attenuator


6GHz N (F-F) 25W Fixed Attenuator

Features

- ✓ Small Size
- ✓ Low VSWR



Test Report

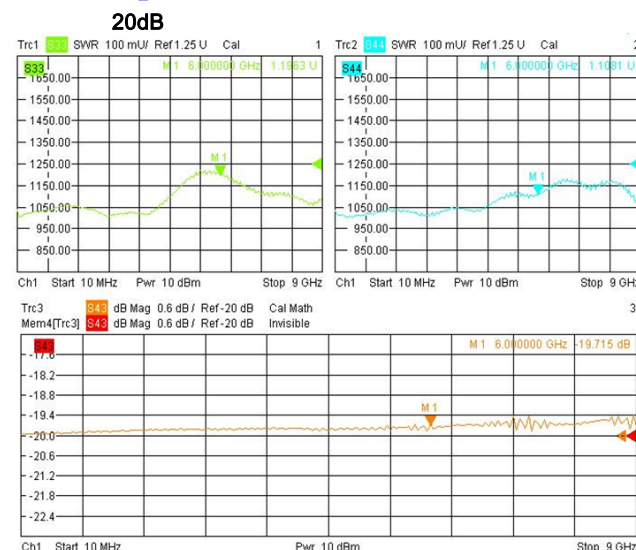

Electrical Specifications

Frequency	DC-6GHz
Standard Values	3,6,10,20,30dB
Attenuation Accuracy	3,6,10 dB:± 0.5dB(Max.) 20dB : ± 0.6dB(Max.) 30dB : ± 0.8dB(Max.)
VSWR	1.25:1(Max.)
Average Power	25W@25°C
Impedance	50Ohm
Input Connection	N Female
Output Connection	N Female

Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connection	Brass	Tri-Metal

Outling Drawing (Unit:mm)

