



00800N1G06H-XX

Attenuator

6GHz N 50W Fixed Attenuator


Features

- ✓ Small Size
- ✓ Low VSWR



Test Report

30dB:

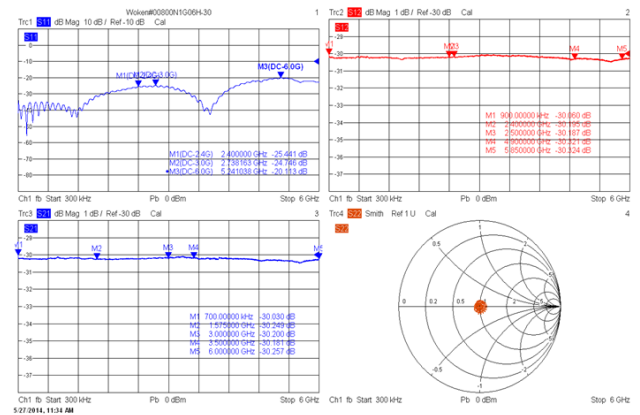

Electrical Specifications

Frequency	DC-6GHz
Attenuation	3,6,10,20,30,40dB
Attenuation Accuracy	3,6,10dB:±0.5dB 20dB:±0.6dB 30,40dB:±0.8dB
VSWR	1.25:1(Max.)
Average Power	50W @25°C
Peak Power	5000W (5μSec Pulse,0.05% Duty Cycles)
Impedance	50Ohm
Input Port	N Male
Output Port	N Female


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Outling Drawing (Unit:mm)

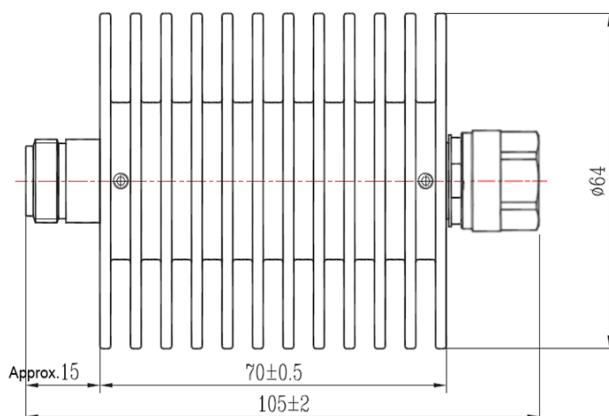

All Specification Changed Without Notification.