



00800N1G07H-XX

Attenuator

6GHz N (M-F) 150W Fixed Attenuator

Features

- ✓ Small Size
- ✓ Low VSWR

Electrical Specifications

Frequency	DC-6GHz
Standard Values	3,6,10,20,30,40dB
Attenuation Accuracy	3dB:±0.85dB
	6,10,20dB:±0.7dB@DC-4GHz,±0.8dB@4-6GHz
	30dB:±0.8dB@DC-4GHz,±0.9dB@4-6GHz
	40dB:±0.9dB
VSWR	3dB:1.25:1(Max.)
	6,10,20,30,40dB:1.20:1(Max.)@DC-4GHz, 1.25:1(Max.)@4-6GHz
Average Power	150W @25°C
Impedance	50Ohm
Input Port	N Male
Output Port	N Female

Mechanical

Durability	500 Cycles
------------	------------


Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Material

Part	Material	Plated
Connection	Brass	

Outling Drawing (Unit:mm)

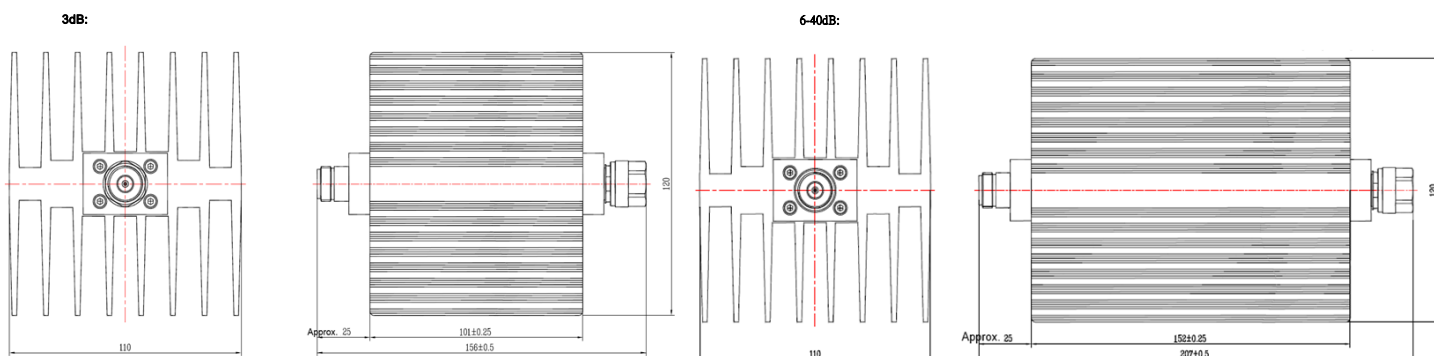

Test Report

3dB:

