



00809N1G10H-XX

Attenuator

6GHz N 100W Fixed Attenuator two way

Features


- ✓ Small Size
- ✓ Low VSWR



Test Report

Electrical Specifications

Frequency	DC-6GHz
Standard Values	6, 10, 20, 30, 40dB
Attenuation Accuracy	6, 10dB: ± 1.0 dB 20dB: ± 1.5 dB 30, 40dB: ± 0.9 dB
VSWR	1.25:1(Max.)
Average Power	100W @25°C
Impedance	50Ohm
Connection 1	N Male
Connection 2	N Female

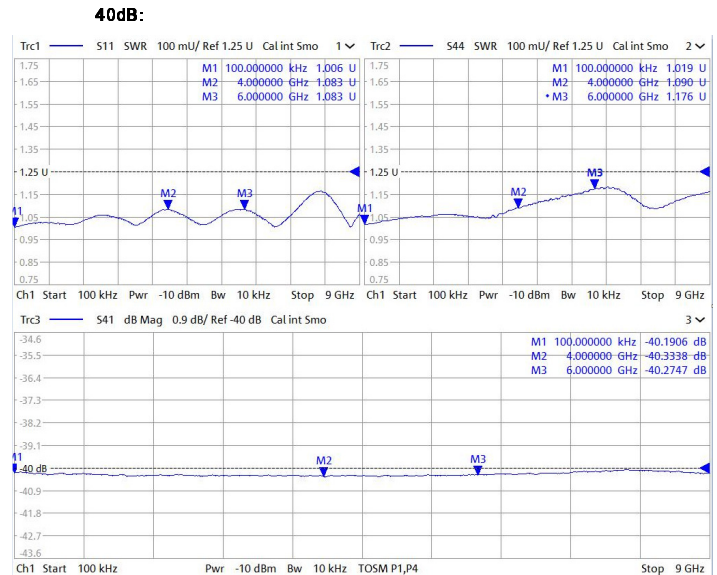



Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-55°C~125°C
-----------------------	-------------

Outling Drawing (Unit:mm)

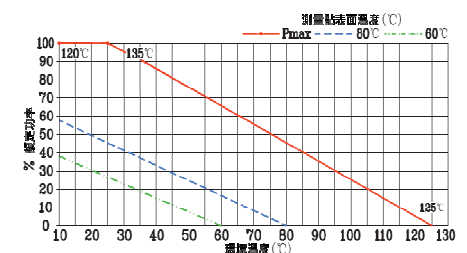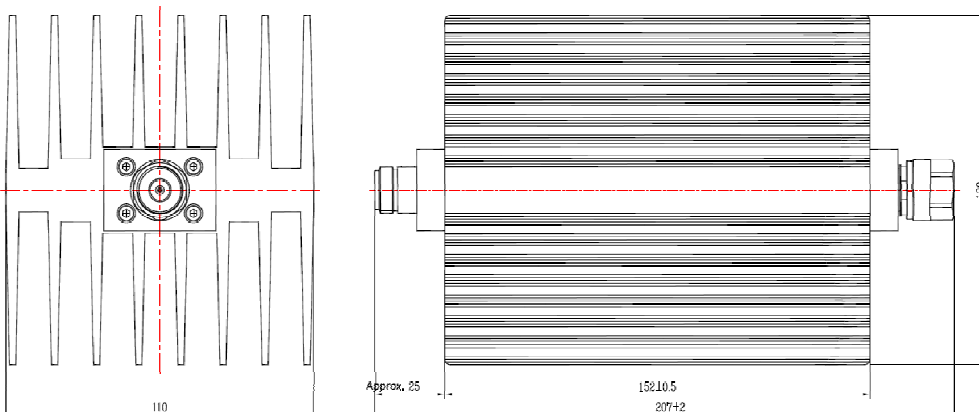

All Specification Changed Without Notification.