




00900A1A2A105L

D.C. Block

100KHz - 3GHz SMA(M-F) Inner DC Block

Features

- ✓ Small Size
- ✓ Lightweight
- ✓ Low VSWR

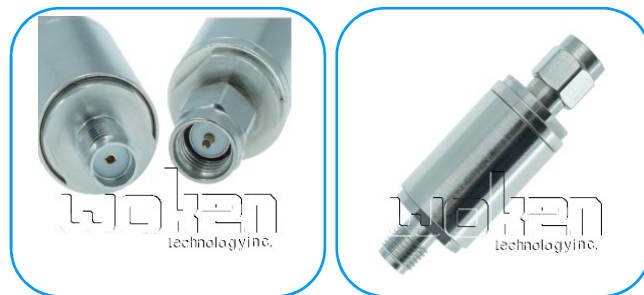

Electrical Specifications

Frequency	100KHz-3GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.5dB(Max.)
DC Input Voltage	120V(Max.)
RF Handling Power	2W(CW) Max.
Impedance	50Ohm
Connection	SMA Male-SMA Female



Mechanical

Durability	500 Cycles
------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold

Outling Drawing (Unit:mm)

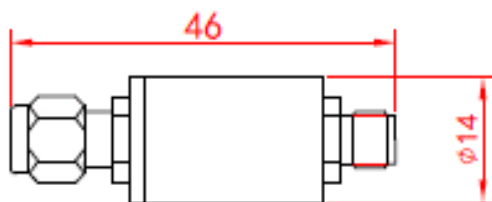

Test Report

