



00900N1N2A2102L

D.C. Block

0.01–18GHz N(M–F) Inner DC Block

Features

- ✓ Small Size
- ✓ Lightweight
- ✓ Low VSWR



Electrical Specifications

Frequency	0.01-18GHz
VSWR	1.5:1(Max.)
Insertion Loss	1.0dB(Max.)
DC Input Voltage	60V(Max.)
Handling Power	1W
Impedance	50Ohm
Connection	N Male-N Female


Mechanical

Durability	500 Cycles
------------	------------

Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	TFE((E=2.2-2.4)	
Gasket	Silicone Rubber	

Test Report

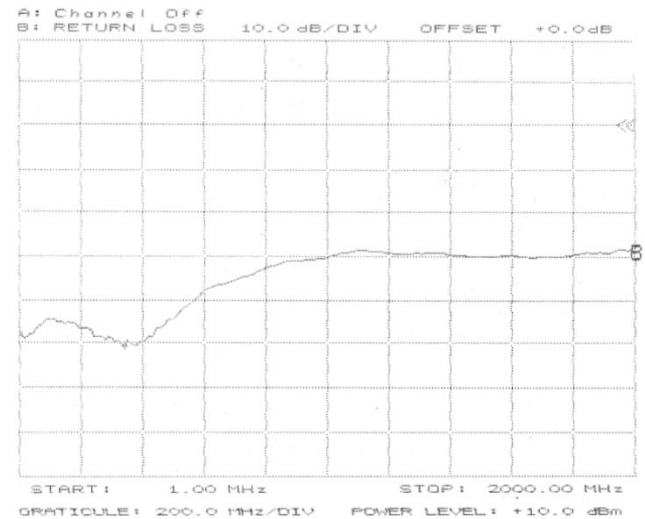

Outling Drawing (Unit:mm)

