

4

3

2

1


Features:

High performance
Light weight

Unit:mm

Specifications:**Electrical:**

Frequency:0.005-3GHz
VSWR:1.20:1(Max.)
Insertion Loss:0.5dB(Max.)
Voltage Rating:60V(Max.)
Impedance: 75Ohm
Connection:N(M-F)

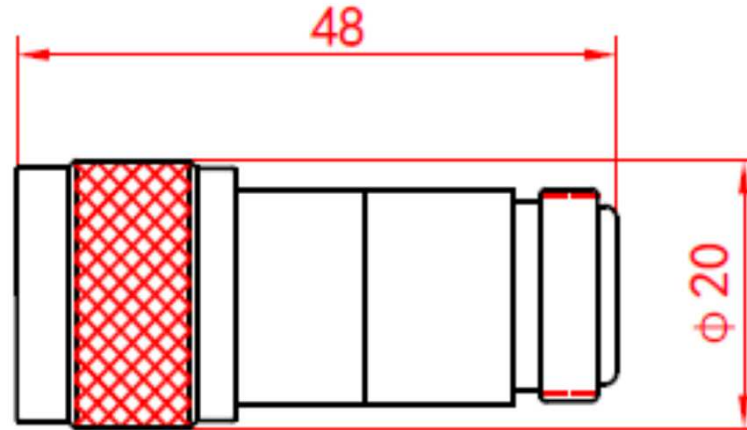**Material:**

Part	Material	Plated
Body	Brass	Nickel
Center Contacts	Brass	Gold
Insulator	Teflon	
Gasket	Silicon Rubber	

UNLESS OTHERWISE SPECIFIED ALL DIMENCIONS
ARE IN mm AND TOLERANCES ARE:

INTEGRAL DIMENSIONS $\pm$ TOLINT


x ± 0.38 .xx ± 0.15

.x ± 0.25 .xx x ± 0.05

ANGULAR DIMENSIONS $\pm$ TOLANG

HOLES UNDER $\phi 5.0$ ± 0.05

THIRD ANGLE PROJECTION



DRAWN	Terence	06/03/10'
ENGR	Jack	06/03/10'
APVD	James	06/03/10'



Woken Technology Inc.

CODE

DWG TITLE

5MHz-3GHz 75 Ω N(M-F)

Inner D.C. Block

SIZE

A4

DWG NO.

00900N1N2B101L

REV

A

4

3

2

1