

0110N10601E-40

Directional Coupler

1-6GHz N 40dB 50W Dual Directional Coupler

Features

- ✓ Miniature Size
- ✓ High Directivity
- ✓ Low VSWR
- ✓ Stripline Construction

Electrical Specifications

Frequency	1-6GHz
Coupling:	40dB
Coupling Accuracy	±1dB
Frequency Sensitivity	±1dB
Insertion Loss (Exclusive Theoretical Loss)	0.4dB(Max.)
VSWR	1.25:1(Max.)
Directivity	16dB(Min.)
Input Power	50W
Impedance	50Ohm
Connection	N Female


Mechanical

Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-40°C~80°C
-----------------------	------------

Outling Drawing (Unit:mm) Tolenrances:±0.3

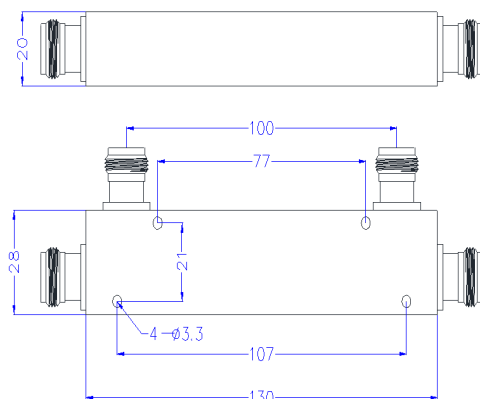

All Specification Changed Without Notification.