




0110N20601E-40

Directional Coupler

2-6GHz N 40dB 50W Dual Directional Coupler

Features

- ✓ Miniature Size
- ✓ High Directivity
- ✓ Low VSWR



Test Report

Electrical Specifications




Frequency	2-6GHz
Coupling	40dB
Coupling Accuracy	±1.2dB(Max.)
Frequency Sensitivity	±0.5dB(Typ.) ±0.7dB(Max.)
Insertion Loss	0.2dB(Typ.) 0.3dB(Max.)
VSWR	1.25:1(Typ.) 1.30:1(Max.)
Directivity	15dB(Min.)
Input Power	50W
Impedance	50Ohm
Connection	N

Mechanical


Durability	500 Cycles
------------	------------

Environmental

Operating Temperature	-45°C~85°C
-----------------------	------------

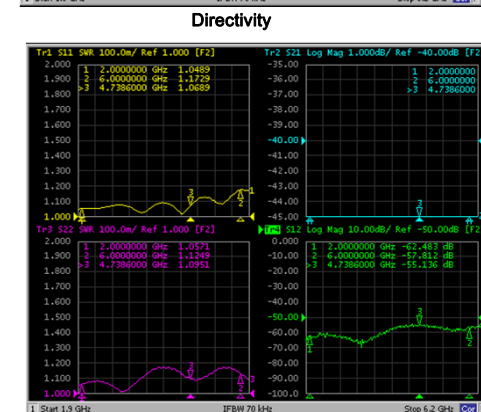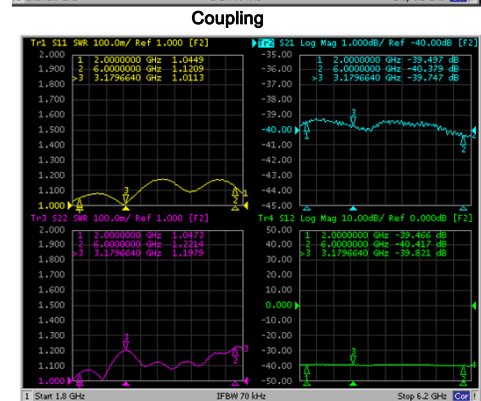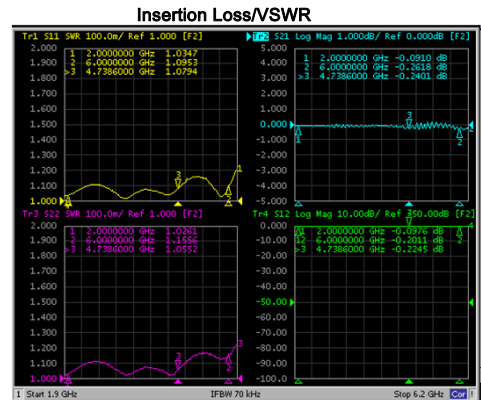

Outling Drawing (Unit:mm[inch]) Tolenrances:±0.2[0.008]

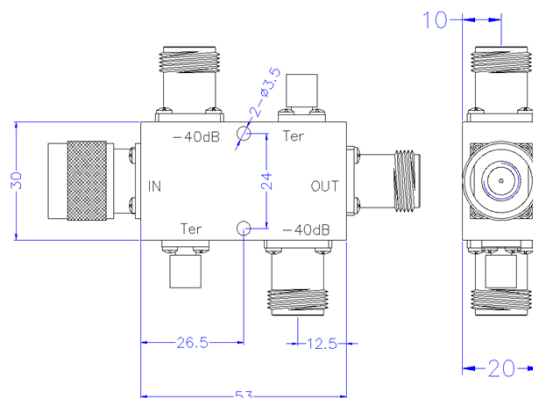

All Specification Changed Without Notification.